

Innovations To Make LIFE SECURE FOR THE NEW INDIA

PRODUCT PORTFOLIO 2022-23
VERSION 1.08

 PROUDLY
MAKING IN INDIA



Content

MD's Note	3
Make In India	4-5
In-house R&D/Quality Control	6-7
Service Support Centre	8
Customized Solutions designing team	9
Technical Support	10
Mission Tech - Partner Training Program	11
HMS/AMS	12
Product Range	13-50
- IP Solution	13-22
- Guard+ Series	23-25
- Video Storage	28
- HD Solution	29-33
- Body worn Solution	34
- Mobile DVR Solution	35
- PoE Ethernet Switches	36-37
- Consumer Series	38-40
- 4G Router/Door bell/Monitor	41
- Video Door Phone	42-43
- Time & Attendance	44
- Accessories	45-48
- Network Rack	49-50



MD's Note

Aditya Khemka

Managing Director, CP PLUS

Amidst the continuously rising security concerns, surveillance has become more important than ever today, not only for governments around the world but also for private enterprises, as modern organizations are becoming complex with their people and processes. Effective security must entail more than just selecting the best products & solutions. Now, with the immense amount of Video Analytics, it serves the purpose of not just security but also business intelligence, making CCTV solutions more intelligent & apt for businesses.

CP PLUS has been the No.1 Indian CCTV brand with state-of-the-art manufacturing facilities at Tirupati, Andhra Pradesh, in line with the PM's Vision of AtmaNirbhar Bharat under the Make-in-India initiative. Today 95% of our product line is being produced under 'Make in India' & the company is working towards 100% Localization and Indigenization, in the coming times, backed by its Indian R&D capabilities in both Hardware and Software as well as Video Analytics.

CP PLUS provides a wide range of products & customized solutions that have been meticulously designed for varied applications and vertical segments ranging from Smart & Safe City needs, Commercial establishments, Industries, Housing, Retail, Banking, Education, Hospitality, Healthcare, Police, Real Estate, Transportation, and many more.

Having executed umpteen projects in every vertical segment, and having sold more than Millions of devices, CP PLUS provides tremendous experience and expertise to its customers. Our products can be seamlessly integrated with allied security needs, may it be alarms, fire protection, access control, etc. to present the complete security eco-system to the customers. Our security design experts are highly trained and accomplished professionals, who have executed most of the renowned projects of India. Our R&D Team at CP Plus Technologix Labs is dedicated to bring the most effective world-class products to enable a better life for our consumers.

CP PLUS stands committed in creating a Safe & Secure India – a truly "Surakshit Bharat".

Jai Hind!

India's Largest
Security & Surveillance Brand

Proudly Making in **INDIA**



State-of-Art Indigenous CP PLUS Manufacturing Facility* at Tirupati



- The futuristic production facility is totally air-conditioned for dust-free manufacturing with ESD flooring.
- With the most advanced high-speed Fuji NXT III SMT lines, numerous HD as well as IP camera assembly lines, offline assembly lines, packaging lines, MI lines, DVR FA lines and an IC programming station, this production facility is the most advanced in the nation.
- It also comprises of reliability test equipment, dark room for aging test, leak test machines, rain water test chamber (IP65, 66), Temperature and humidity chamber, double winged drop tester, salt spray/alcohol resistance tester & cable bending tester.
- As technology is improving in many areas rapidly, our R&D team is working with a renewed passion to come up with products that truly ease life for people around the world.
- Our all in-house R&D team pro-actively caters to the dynamic market demands.

— Tech & Sales Support No. —

📞 **8800952952**

In-house R&D team

pro-actively caters to the dynamic market demands

Product specification

- Documentation of product design
- Costing of components and sourcing
- Roadmap of product life cycle
- Gauging market demand



Engineering Validation & Testing

- Firmware & application development
- Server integration
- Creation of prototype with subsequent OEM discussions




Production Validation & Testing

- Rigorous testing iterations for checking operating performance
- Production trial runs for checking manufacturing process efficiency
- Final software release after eliminating all bugs



Design Validation & Testing

- Hardware & software integration
- Beta testing for ironing out bugs



Mass Production

- Regular monitoring with numerous quality checks
- Sample testing for detecting and fixing defective products
- Cost optimization process for reducing manufacturing cost



Regular Monitoring

- Regular software upgrades & bug fixes for ensuring smooth user experience
- Phasing out of product at end of lifecycle




In-house Quality Control

A dedicated in-house quality control team ensures quality across the wide spectrum of offered products



Basic inspection

- Colour
- Housing material
- Matching specifications
- Label printing

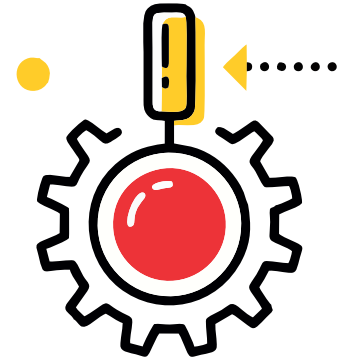


Quality inspection

- Light test
- Lens focus test
- IR board and sensor check
- Water proofing
- Audio test
- Drop test



Packaging inspection

- Camera box printing
- Logo printing
- Carton label check
- Manual check
- Hologram check
- Packaging of right accessories



Detailed report on anomalies

Dedicated team that undertakes the same stringent process every time to ensure quality



Dedicated Service Support Center

Customer First.
Always. Every time.

More
Accessible

More
Approachable

More
Responsive

More
Dependable

More
Transparent

In CP PLUS culture, we reiterate the doctrine that the customer comes first. Always and every time. As CP PLUS is trusted across the country by all the distributors in the industry, the brand is known for delivering exceptionally fast and effective service. We have over 40 service centers & 24 collection centers spread across the country. The team consists of hundreds of members through the country to provide post-sales technical support and to help distributors, dealers and end users to commission newly purchased solutions and to troubleshoot their current products.


**upar wala sab
dekh raha hai**

PROUDLY **MAKING IN INDIA**

Customized Solutions Designing Team



We have a customized solutions designing team that earnestly crafts tailor-made solutions for all the different verticals ranging from banking to even the oil and gas industry after having done thorough field work and perfectly understanding the specific requirements of any given premises, may it be a shopping mall, a judicial court or entire multi-acred educational institutes. Our designing team is recognized for exceptional technical solutions and with integrated, extensible and flexible designs, they profulfil the evolving business requirements.


**upar wala sab
dekh raha hai**

PROUDLY / MAKING IN INDIA

Technical Support & Customer Service Cell

CP PLUS has designed and structured a proficient tech support team to enhance the customer experience and to resolve any occurring issues instantaneously. The team provides support for the entire range of CP PLUS products for the better part of the day every weekday. The support is also provided in 12 languages including Malyalam, Tamil and several vernacular languages readily catering to the lingual diversity of the country. 2500 callers are satisfied on a regular basis through assisting the troubleshooting of products and setting up of new products as well provided information about the way different technologies work.


upar wala sab
dekh raha hai


PROUDLY / MAKING IN INDIA

 **MISSION TECH**
A CP PLUS Initiative


CP PLUS Certification Training Program For System Integrators & Partners

The security & surveillance industry is on an upswing with a burgeoning need for trained and qualified System Integrators, who can design customized solutions as per the customer's needs, as well as in the most efficient and effective manner. The pace of the industry is such that it requires system integrators to be consistently updated and informed about the latest technological advancements, and the skill sets have to be honed to work with the latest state-of-the-art products and solutions. The CP PLUS Training Program is a step in the direction to provide that much-needed training with an effort to keep our channel partners upskilled and our services relevant.

Local Customize Software Solution

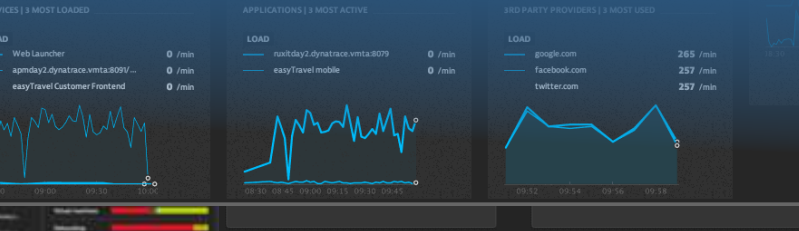

Health Monitoring System (HMS)

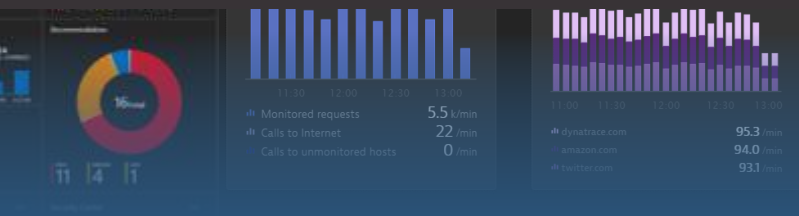

HMS



Ensuring the smooth functioning of surveillance systems is crucial for the efficiency of a security solution. While monitoring the performance of a small security setup is easily possible, the complex systems that involve multiple cameras and recorders, pose a serious challenge.

The Health Monitoring System by CP PLUS provides a real-time health status of your surveillance devices; it keeps you notified of the perceived critical issues and potential problems such as device going offline, hard drive failure, recording status, network outages, tampering, etc. Investing in the HMS helps you detect system issues automatically. It enables instant reporting of live incidents, reduces system downtime since issues are detected and rectified at the onset and provides daily system supports as well as live status web page view.

CP PLUS provides the HMS solution software which comes complete with live system reporting, alerts and alarms for hard drive failure, recording status, network outages, tampering, etc.

Attendance Monitoring Solution (AMS)



AMS

The Attendance Management Solution (AMS) is a cloud-based facilitation tool for employers and employees, to track attendance, leaves, late comings, holidays, leave applications, and conveyance time & costs on a daily/monthly basis.

By simply downloading the AMS application on smart phones, employees can mark their attendance from anywhere, wherein their location and login time is captured using GPS. Employers, on the other hand, can keep a track of the regularity, attendance and punctuality of employees from anywhere, anytime. Ready access to the consolidated data of all employees with regard to their attendance, leaves and conveyance, in one place, helps them generate employee-efficiency reports and computes salaries with ease. AMS effectively plugs the loopholes of traditional tracking systems and provides transparency as well as comfort to both the employer and employees.

INTELLIGENT IP SOLUTION



2 MP Distribution Series

CP-UNC-DA21ZPL4-M

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.7" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L5C-V/TA21L8C-V

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm, 8mm, optional)
- IR Range of 50/80 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21ZPL5-M

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.7" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA21PL3-V3

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream/Smart H.265 Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21PL3-V3

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream/Smart H.265 Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L3

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.7" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080) @25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, EIS, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21L3-MDS

2MP Full HD WDR IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-VB21L3-MDS

2 MP Full HD WDR IR Vandal Dome Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-DA21PL3C-V3
2MP Full HD IR Network Dome Camera



► Features:

- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21PL3C-V3
2MP Full HD IR Network Bullet Camera



► Features:

- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & Smart H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-DB21L3C-MDS
2MP Full HD WDR IR Network Dome Camera



► Features:

- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 Dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-DA41PL3-D
4MP WDR IR Network Dome Camera - 30Mtr.



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-DA41PL3-V3
4MP IR Network Bullet Camera



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4MP(2560 × 1440)@25/30fps
- Instastream, H.265, Smart H.264, H.264 dual stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-DA41ZPL4-MD
4MP WDR IR Network Dome Camera - 40Mtr.



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP@25/30fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DB41L3C-MD
4MP WDR IR Network Dome Camera



► Features:

- 1/3" 4MP CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@4MP
- 2.8mm fixed lens (3.6mm optional)
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- IR Range of 30 Mtrs., IP67, PoE, Built-in Mic, Micro SD Card,
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41L3-MDS
4 MP WDR IR Network Bullet Camera



► Features:

- 1/3" 4MP CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@4MP
- 2.8mm fixed lens (3.6mm optional)
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- IR Range of 30 Mtrs., IP67, Built-in IR LED, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41PL3-D
4MP WDR IR Network Bullet Camera - 30Mtr.



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-TA41ZPL5-MD
4MP WDR IR Network Bullet Camera - 50Mtr.



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP@25/30fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41L3-MDS
4 MP WDR IR Network Vandal Dome Camera



► Features:

- 1/3" 4MP CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@4MP
- 2.8mm fixed lens (3.6mm optional)
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- IR Range of 30 Mtrs., IP67, IK10, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-TB41L5-MDS
4MP WDR IR Bullet Camera



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- 4MP (2560 × 1440)@25/30fps
- Instastream/H.265/H.264+/H.264 triple Stream Video Compression
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC, HLC
- 6mm Lens (3.6mm optional)
- IR Range of 50 Mtrs, IP67, Micro SD Card
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-TA41PL3C-D
4MP WDR IR Network Bullet Camera



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP (2560 × 1440)@25/30fps
- Instastream & H.265 Dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41PL3C-D
4MP WDR IR Network Dome Camera



► Features:

- 1/3" 4MP PS CMOS Image Sensor
- Max. 4MP (2560 × 1440)@25/30fps
- Instastream & H.265 Dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


CP-UNC-TA41L5C-D-V3
4MP IR Network Bullet Camera



► Features:

- 1/2.7" 4MP PS CMOS Image Sensor
- Max. 4MP (2688 × 1520) @20fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm optional)
- IR Range of 50 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41L8C-D-V3
4MP IR Network Bullet Camera



► Features:

- 1/2.7" 4MP PS CMOS Image Sensor
- Max. 4MP (2688 × 1520) @20fps
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm, 8mm optional)
- IR Range of 80 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP Distribution Series

CP-UNC-DA51L3C

5MP IR Network Dome Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max. 5MP (2880 × 1620)@20fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA51L3C

5MP IR Network Bullet Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max. 5MP (2880 × 1620)@20fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB51L3-MDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB51L3-MDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

8 MP Distribution Series

CP-UNC-DA81L3C

8MP IR Network Dome Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
 - Max. 8MP (3840 × 2160)@15fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB81L3-MDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 15fps@8MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA81L3C

8MP IR Network Bullet Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
 - Max. 8MP (3840 × 2160)@15fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB81L3-MDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 15fps@8MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Fisheye Series

CP-UNC-EE51L1C-VMD

5MP Panoramic Network IR Fisheye Camera



- Features:
- 1/2.7" 5MP progressive scan CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25fps@5MP(2592×1944)
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 1.4mm fixed lens, Built-in Mic, Micro SD Card, PoE
 - IR Range of 10 Mtr.
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP Project Series

CP-UNC-VB21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream, H.265, Smart H.264+, Dual stream encoding
 - Max. Output 2MP(1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs.
 - Support Built in Mic, Micro SD Card, IP67, IK10, SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC21ZL4C-VMDS

2MP Full HD WDR Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream and H.264+ triple-stream encoding
 - Max. 2MP (1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), EIS, Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Support Built-in Mic, Micro SD Card, IP67, IK10, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VD21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265, H.264 encoding
 - Max. Outputs 2 MP (1920 × 1080) @50/60fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21ZL6C-VMDS

2MP Full HD Network IR Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream, H.265, Smart H.264+, Dual stream encoding
 - Max. Output 2MP(1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built in Mic, Micro SD Card, IP67, IK10, SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21ZL6S-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image sensor
 - Max. 25/30fps@2MP (1920×1080)
 - Instastream and H.264+ Encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm~13.5mm Motorized Lens
 - IR Range upto 60 Mtrs, IP67, IK10(Optional), Micro SD Card, PoE
 - Supports Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21L5C-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, PoE, Micro SD Card, Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21ZL6C-VMDS

2MP Full HD WDR Network IR Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream and H.264+ triple-stream encoding
 - Max. 2MP (1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), EIS, Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm- 13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built-in Mic, Micro SD Card, IP67, IK10(optional), PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

<p>CP-UNC-TC21L8-VMDS 2MP Full HD WDR IR Network Bullet Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@2MP • 3.6mm fixed lens (6mm, 8mm, 12mm optional) • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • IR Range of 80 Mtrs, IP67, Micro SD Card, PoE • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-TC21ZL6-VMDS 2MP Full HD WDR IR Network Bullet Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@2MP • 2.7 -13.5mm Motorized lens • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • IR Range of 60 Mtrs, IP67, IK10(Optional), Micro SD Card, PoE • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-TD21ZL5-VMD 2 MP Full HD WDR IR Network Bullet Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@2MP • 2.7 -13.5mm Motorized lens • WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC, HLC • IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-TD21ZL6C-VMDS 2MP IR Bullet Network Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP PS CMOS Image Sensor • AI Instastream, Instastream, H.265, Smart H.264 encoding • Max. Output 2MP(1920×1080)@50/60fps • WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, HLC, BLC • 2.7mm-13.5mm Motorized Lens • IR Range of 60 Mtrs. • Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0 • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro
<p>CP-UNC-TE21ZL5P-VMD 2MP Full HD WDR IR Network Bullet Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/1.8" 2Megapixel PS CMOS Image Sensor • Instastream/ H.265 / H.264+ / H.264 Quad-stream encoding • Max 25/30fps@1080P(1920×1080) • WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC • 2.7mm ~12mm motorized lens • IR Range of 50 Mtrs., Support Micro SD Card IP67, IK10, PoE, ePoE • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VB21ZL4-VMDS 2MP Full HD WDR IR Network Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@2MP • 2.7 -13.5mm Motorized lens • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • Support Starlight Function • IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VC21L5-VMDS 2MP Full HD WDR IR Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2Megapixel PS CMOS Image Sensor • Max. 2MP (1920×1080)@30fps • Instastream & H.265 triple-stream encoding • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC • 3.6mm Lens (2.8mm, 6mm Optional) • IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VE21ZL4P-VMD 2MP Full HD WDR IR Network Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/1.8" 2Megapixel PS CMOS Image Sensor • Instastream/ H.265 / H.264+ / H.264 Quad Stream encoding • Max 25/30fps@1080P(1920×1080) • WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC • 2.7mm ~12mm motorized lens • IR Range of 40 Mtrs., Micro SD Card IP67, IK10, PoE, ePoE • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro
<p>4 MP Project Series </p>			
<p>CP-UNC-VC21ZL4-VMDS 2 MP Full HD WDR IR Network Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@2MP • 2.7 -13.5mm Motorized lens • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-BE21C-VMDF 2MP Full HD AI WDR Box Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/1.8" 2Megapixel Progressive scan CMOS • Max. 50/60fps@1080P(1920 x 1080) • C/CS Mount lens • WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC • Instastream and H.264+ triple-stream encoding • Auto back focus (ABF) , Support Micro SD Card, PoE • 2/1 Alarm in/out, 1/1 audio in/out (Built-in Mic) • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-PD21-VD-V2 2MP Full HD WDR Network Pinhole Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.8" 2MP PS CMOS Image Sensor • Max. 25/30fps@1080P (1920×1080) • 2.8mm Fixed Lens • WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC • Smart Instastream and H.264+ dual-stream encoding • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-DC41L5C-MDS 4MP WDR IR Network Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.7" 4MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@4MP • 2.8mm fixed lens (3.6mm, 6mm optional) • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • IR Range of 50 Mtrs., IP67, Micro SD Card, PoE, Built-in Mic • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro
<p>CP-UNC-TC41L5C-VMDS 4MP WDR IR Network Bullet Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.7" 4MP CMOS Image Sensor • Instastream & H.265 triple-stream encoding • Max. 25/30fps@4MP • 2.8mm fixed lens (3.6mm, 6mm optional) • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • IR Range of 50 Mtrs., IP67, Micro SD Card, PoE, Built-in Mic • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VB41ZL4C-VMDS 4MP Network IR Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/2.9" 4MP PS CMOS Image Sensor • Instastream, Smart H.264, Dual stream encoding • Max. Output 4MP(2688 × 1520)@20 fps and 2560 × 1440@25/30 fps • WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC • 2.7mm-13.5mm Motorized Lens • IR Range of 40 Mtrs • Built in Mic, IP67, IK10, Micro SD Card, SMD Plus • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VC41ZL4C-VMDS-V2 4MP WDR Network IR Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/3" 4 Megapixel PS CMOS Image Sensor • AI Instastream, Instastream, H.265 and H.264, triple-stream encoding • Max. Output 4MP (2688 × 1520)@25/30fps. • WDR(120dB), Day/Night (ICR), SMD 4.0, 3D-DNR, ROI, AWB, AGC, BLC, HLC, EIS • 2.7mm-13.5mm Motorized Lens • IR Range of 40 Mtrs • Support Built-in Mic, Micro SD Card, IP67, IK10, PoE • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro 	<p>CP-UNC-VD41ZL4C-VMDS 4MP Network IR Vandal Dome Camera</p>  <p>► Features:</p> <ul style="list-style-type: none"> • 1/3" 4MP PS CMOS Image Sensor • AI Instastream, Instastream, H.265, H.264 encoding • Max. 4 MP (2688 × 1520) @25/30fps • WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC • 2.7mm-13.5mm Motorized Lens • IR Range of 40 Mtrs • Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0 • Support Starlight Function • Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41ZL6C-VMDS

4MP Network IR Bullet Camera



- Features:
- 1/2.9" 4MP Progressive CMOS Image Sensor
 - Instastream, Smart H.264, Dual stream encoding
 - Max. 4 MP (2688 × 1520)@20 fps, 2560 × 1440@25/30 fps
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Built in Mic., Micro SD Card, IP67, IK10 (optional), SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41ZL6-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 60 Mtrs., IP67, PoE, Micro SD Card,
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC41ZL6-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 60 Mtrs., IP67, IK10(optional), Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC41L8-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 3.6mm fixed lens (6mm, 8mm, 12mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 80 Mtrs., IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD41ZL6C-VMDS

4MP Network IR Bullet Network Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265, Smart H.264 encoding
 - Max. 4MP(2688 × 1520)@25/30 fps
 - WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, HLC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD41ZL5-VMD

4 MP WDR IR Network Bullet Camera



- Features:
- 1/2.8" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41ZL4-VMDS

4MP WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC41ZL4-VMDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC41L5-VMDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-BG41C-VMD

4MP AI Network Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - C/CS Mount lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream/H.265/Smart H.264+/H.264 coding
 - Support Built-in Mic, Micro SD Card, PoE+, ePoE
 - With deep learning algorithm, it supports people counting, face detection, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TG41ZL6-VMD

4MP AI IR Network Bullet Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream/H.265/Smart H.264+/H.264 coding
 - IR Range of 60 Mtrs, IP67, IK10, Micro SD Card, PoE+
 - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VG41ZL4-VMD

4MP AI IR Network Vandal Dome Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream/H.265/Smart H.264+/H.264 coding
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE+
 - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP WDR Project Series

CP-UNC-TE42ZL12P-VMDS

4MP AI WDR IR Network Bullet/Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. 4MP(2688 × 1520)@30fps
 - Instastream, H.265, Smart H.264+ Triple-Stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 10mm~40mm Motorized Lens
 - Support Starlight Function
 - IR Range of 120 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE, SMD 3.0
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB51ZL4-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AGC, BLC, HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51ZL4-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AGC, BLC, HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51ZL4C-VMDS-V2

5MP WDR Network IR Vandal Dome Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - AI Instastream, Instastream and H.265 triple-stream encoding
 - Max. 5MP (2960 × 1668) @20fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs, Support Built-in Mic, SMD 4.0, AI SSA, Micro SD Card, IP67, IK10, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51L5-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB51ZL6-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC51L5C-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 50 Mtrs, IP67, Built-in Mic, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC51ZL6-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

8 MP WDR Project Series

CP-UNC-TC51ZL6C-VMDS-V2

5MP WDR Network IR Bullet Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - AI Instastream, Instastream and H.265 triple-stream encoding
 - Max. 5MP (2960 × 1668) @20fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm- 13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built-in Mic, SMD 4.0, AI SSA
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB81ZL4-VMDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 15fps@8MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB81ZL6-VMDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 15fps@8MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VE81ZL4P-VMDS

8MP AI WDR IR Network Vandal Dome Camera



- Features:
- 1/1.8" 8MP PS CMOS Image Sensor
 - Outputs Max. 8MP (3840 × 2160)@25/30fps
 - Instastream & H.265 triple-stream encoding
 - Support Starlight Function
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens, IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP ePoE Project Series

CP-UNC-TE81ZL6E-VMDS

8MP AI WDR IR Network Bullet Camera



- Features:
- 1/1.8" 8MP PS CMOS Image Sensor
 - Outputs Max. 8MP (3840 × 2160)@25/30fps
 - Instastream & H.265 triple-stream encoding
 - Support Starlight Function
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens, IR Range of 60 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VE21ZL4E-VMD

2MP Full HD AI WDR IR Vandal Dome Camera



- Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
 - Instastream / H.265 / H.264+ / H.264 triple-stream encoding
 - Max 25/30fps@1080P(1920×1080)
 - 2.7mm ~13.5mm motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs, Support ePoE, PoE, IP67, IK10, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL5E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@1080P (1920 × 1080)
 - 2.7-13.5mm Motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL15E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@1080P (1920 × 1080)
 - 5.3~64mm motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
 - IR Range of 150 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP ePoE Project Series

CP-UNC-TE21ZL20E-VMD

2 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 50/60fps@2MP
 - 5.3mm ~64mm motorized lens
 - WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
 - IR Range of 200 Mtrs, IP67, IK10, Micro SD Card, ePoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-BE21CE-VMD

2 MP Full HD WDR AI Network Box Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - Auto back focus(ABF)
 - WDR(120dB), Day/Night(ICR), 3DNR, Defog, EIS, AWB,AGC,BLC
 - Micro SD Card, PoE, Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VE41ZL4E-VMD

4MP WDR AI IR Network Vandal Dome Camera



- Features:
- 1/1.8" 4Megapixel PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max 25/30fps@(2688 × 1520)
 - 2.7mm-12mm Motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE41ZL5E-VMD-V2

4MP WDR AI IR Bullet Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - 25/30fps@(2688 × 1520)
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

FishEye

CP-UNC-EH4K121L1-VM

12 MP Network Fisheye Camera



- ▶ Features:
- 1/1.7" 12MP CMOS Image Sensor
- H.265 & H.264 triple-stream encoding
- Max. 25fps@12MP
- 1.98mm fixed lens
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- IR Range of 10 Mtrs., IP67, IK10, PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP PTZ Distribution Series

CP-UNP-E2521L15-DAP

2 MP 25x WDR Network IR PTZ Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.8mm~120mm Lens (25x Zoom)
- WDR(120dB), 3D-DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
- H.265/H.264 / MJPEG dual-stream encoding
- Up to 300 Presets, 8 auto scan, 8 tour, 5 pattern, 8 auto pan
- IR Range of 150 Mtr., IP66, PoE+, Auto Tracking
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3221L15-DFP

2MP WDR 32x IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@2MP
- 4.8mm ~ 154mm (32x Zoom)
- WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
- Instastream, H.265; H.264+; H.264B; H.264M; H.264H; MJPEG (sub stream)
- Up to 300 Presets, 5 Auto scan, 8 Tour, 5 Pattern
- IR Range of 150 Mtr., Built-in 2/1 alarm in/out, IP67, IK10, Micro SD Card, PoE+
- Support Starlight Function, Face Detection, SMD PLUS
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F3021L20-DAP

2 MP 30x WDR Network IR PTZ Camera



- ▶ Features:
- 1/2.8" CMOS Image sensor
- Max. 50/60fps@1080P
- 4.5mm~135mm Lens (30x Zoom)
- WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
- Instastream /H.265/H.264+ /H.264 dual-stream encoding
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP PTZ Distribution Series

CP-UNP-F4521L25-DFP

2MP 45x WDR IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 25/30fps@1080P
- 3.95mm~177.7mm (45x Zoom)
- WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Defog, ROI, BLC, HLC
- Support Starlight Technology
- IR Range of 250Mtr., IP67, IK10, Built-in 7/2 alarm in/out, Micro SD Card, Support PoE+
- Up to 300 presets, 8 tour, 5 pattern, 5 auto scan
- Support Face detection, SMD Plus, Auto-Tracking
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-D2521L10-DN

2MP 25x WDR Network IR PTZ Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 25/30fps@1080P
- 4.8mm~120mm lens (25x Zoom)
- WDR(120dB), 3D-DNR, Day/Night (ICR), ROI, Defog, AWB, BLC, HLC
- Instastream, H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream)
- Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP66, Support PoE+
- Support Face Detection, SMD Plus
- Support Starlight Function

CP-UNP-F4521L25-DAP

2MP 45x WDR Network IR PTZ Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), Day/Night(ICR), 2D/3D-DNR, Defog, ROI, EIS, AGC, BLC, HLC
- Instastream /H.265/H.264+ /H.264 dual-stream encoding
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 250 Mtr., IP67, IK10, Micro SD Card, Auto Tracking PoE+
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3241L15-DPF

4MP WDR 32x IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 4MP CMOS Image sensor
- Max. 25/30fps@4MP
- 4.8mm~156mm Lens (32x Zoom)
- WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
- Support Starlight Technology
- IR Range of 150 Mtr., Built-in 2/1 alarm in/out, IP67, IK10, Micro SD Card, PoE+, Up to 300 Presets, Auto scan, 8 Tour, 5 Pattern, Auto Scan
- Support Face Detection, SMD PLUS, Deep-learning-based auto tracking and perimeter protection
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3241L18-DFP

4MP WDR 32x IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 4MP CMOS Image sensor
- Max. 25/30fps@4MP
- 4.8mm ~ 154mm (32x Zoom)
- WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
- Support Starlight Technology
- IR Range of 175 Mtr., Built-in 2/1 alarm in/out, IP67, IK10, Micro SD Card, PoE+, SMD PLUS
- Up to 300 Presets, 5 Auto scan, 8 Tour, 5 Pattern
- Support Face Detection
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4541L25-DAS

4MP WDR 45x IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 4MP CMOS Image sensor
- Max. 25/30fps@4MP
- 3.95mm~177.75mm (45x Zoom)
- WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Defog, ROI, AGC, AWB, BLC, HLC
- Support Starlight Technology
- IR Range of 250 Mtr., Built-in 7/2 alarm in/out, IP67, IK10, Micro SD Card, Auto Tracking, PoE+
- Up to 300 presets, Auto scan, 8 Tour (up to 32 presets per tour), 5 Pattern, 5 Auto pan
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP PTZ Project Series

CP-UNP-3051L20A

5MP 30x Network IR PTZ Camera



- ▶ Features:
- 1/1.9" 5MP CMOS Image sensor
- Max. 25/30fps@5MP
- 6mm~180mm Lens (30x Zoom)
- DWDR, Day/Night(ICR), 3D DNR, Defog, EIS, ROI, BLC, HLC, AGC
- H.265/H.264+ /H.264 dual-stream encoding
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Highend PTZ Project Series

CP-UNP-F4521L30-DAP

2MP 45x WDR Network IR PTZ Camera



- ▶ Features:
- 1/2.8" CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
- Instastream /H.265/H.264+ /H.264 dual-stream encoding
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 300 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4521R55-DAP

2MP 45x Laser WDR Network PTZ Camera



- ▶ Features:
- 1/2.8" CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
- Instastream /H.265/H.264+ /H.264 dual-stream encoding
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 550 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4821L45-DAP

2 MP 48x WDR Network IR PTZ Camera



- ▶ Features:
- 1/1.9" 2MP CMOS Image sensor
- Max. 50/60fps@1080P
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), 2D/3D-DNR, ICR, EIS, ROI, Defog
- Instastream/H.265/H.264+ /H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP67, Hi-PoE, Micro SD Card, Auto Tracking
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-H4041L45-DAP

4MP 40x WDR Network IR PTZ Camera



- ▶ Features:
- 1/1.8" 4MP CMOS Image sensor
- Max. 25/30fps@4MP
- 5.6mm~223mm Lens (40x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+ /H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3041L15-DAP

4MP 30x WDR Network IR PTZ Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image sensor
- Max. 25/30fps@4MP
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 3D-DNR, Day/Night(ICR), EIS, Defog, ROI, BLC, HLC
- Up to 300 presets, auto scan, 8 tour, 5 pattern, auto pan, IR Range of 150 Mtr., IP66, Support PoE+
- Instastream/H.265/H.264+ /H.264 dual stream encoding
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Anti-Corrosion PTZ Project Series

CP-UNP-H4081L45-DAP

8MP 40x WDR Network IR PTZ Camera



- ▶ Features:
- 1/1.8" 8MP CMOS Image sensor
- Max. 25/30fps@4K
- 5.6mm~223mm Lens (40x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F3021U-DAP

2MP 30x WDR Anti-Corrosion Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.5mm~135mm Lens (30x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- 316L Stainless Steel, IP68, IK10, Micro SD Card, Auto Tracking, IVS, NEMA 4X, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-Z3021U-D

2MP 30x WDR Anti-Corrosion IR Network Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.5mm~135mm Lens (30x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- 316L Stainless Steel, IR Range of 100 Mtr., IP68, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Positioning PTZ Project Series

CP-UNP-P4521L35-DAP

2MP 45x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 350 Mtr., IP68, Micro SD Card, Auto Tracking, IVS, NEMA 4X, Hi-PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P4821L45-DA

2MP 48x WDR Network IR Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP66, Micro SD Card, Auto Tracking, IVS
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P4821L93-DA

2MP 48x WDR Network Laser Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- Laser Range of 1200 Mtr., IP66, Micro SD Card, Auto Tracking, IVS, Wiper
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P2521L15-DAP

2MP 25x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.8mm~120mm Lens (25x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 150 Mtr., IP67, IK10, Micro SD Card, Auto Tracking, IVS, PoE+
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Explosion-proof Project Series

CP-UNC-ST21ZL10-VMD

2MP 30x Explosion-proof IR Network Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical zoom and 16x Digital zoom
- WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
- 304 stainless steel housing
- H.265 Video Compression
- IR distance up to 100mtr., IP68
- Support Starlight Technology
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-S3021L10-D

2MP 30x Explosion-proof IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D-DNR, Defog, EIS, Day/Night (ICR), AGC, BLC, HLC
- 316L Stainless Steel Housing
- H.265 Video Compression
- Up to 256 presets, 5 Scan, 8 Tour
- IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP68
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-S3021-D

2MP 30x Explosion-proof Network Positioning PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
- 316L Stainless Steel Housing
- Instastream/H.265/H.264+/H.264
- Up to 256 Presets, 5 auto scan, 8 tour
- Built-in 2/1 alarm in/out, IP68
- Starlight Technology
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Distribution NVR Series

CP-UNR-104F1/108F1

4/8 Ch. Network Video Recorder



- ▶ Features:
 - 4/8 channel IP camera input
 - Max 80Mbps Network Bandwidth
 - Instastream/H.265/H.264+/H.264 codec decoding
 - Up to 8MP Resolution
 - Support 1 SATA HDDs up to 8TB, 2 USB Ports
 - HDMI / VGA simultaneous video output
 - Support Multi-brand network cameras
 - ONVIF Version 2.4 conformance
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-208F2-I


8 Ch. AI Network Video Recorder



- ▶ Features:
 - 8 Channel IP video access
 - Instastream / H.265/H.264+ /H.264/MJPEG
 - Max. decoding capability: 6 × 1080p@30fps. Supports adaptive decoding
 - 1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images
 - AI by camera: Face detection and recognition, perimeter protection and SMD
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2082

8 Ch. 4K H.265 Network Video Recorder



- ▶ Features:
 - 8 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082-V2

8 Ch. 4K Network Video Recorder



- ▶ Features:
 - 8 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-216F2-I

16Ch. AI Network Video Recorder



- ▶ Features:
 - 16 Channel IP video access
 - Instastream/ H.265/H.264+ /H.264/MJPEG
 - Max. decoding capability: 6 × 1080p@30fps. Supports adaptive decoding
 - 1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images
 - AI by camera: Face detection and recognition, perimeter protection and SMD
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2161-V2

16 Ch. 4K Network Video Recorder



- ▶ Features:
 - 16 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 1 SATA HDDs up to 6TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4164-I

16 Ch. 4K Network Video Recorder



- ▶ Features:
 - Up to 16 channel IP camera input
 - Access, storage or forwarding at 256 Mbps (160 Mbps when AI function enabled)
 - Instastream/H.265/Smart H.264+/H.264/MJPEG
 - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
 - AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map
 - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5164/4K5324-V2

16/32 Ch. 4K Network Video Recorder



- ▶ Features:
 - 16/32 Channel IP Camera Input
 - Instastream/H.264+/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / 2 VGA simultaneous video output
 - Support 4 SATA HDDs up to 10TB Each, 3 USB(2 USB 3.0), 1 eSATA Port, 1 RS485, 1 RS232
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4322-V3

32Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 32 channel IP camera input
 - Instastream/H.265/H.264+/H.264 codec decoding
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082/4K4322-V2

8/32 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 8/32 Channel IP Camera Input
 - H.265/H.264 dual codec decoding
 - Max 200Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB, 2 USB(1 USB3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4162-V3

16 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 16 channel IP camera input
 - Instastream/H.265/H.264+/H.264
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - VGA/HDMI simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4324-I

32 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 32 channel IP camera input
 - Access, storage or forwarding at 256 Mbps (160 Mbps when function enabled)
 - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
 - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5644-V2

64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 64 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max 320Mbps incoming bandwidth
 - Up to 12MP resolution preview and playback
 - Support 4 SATA HDDs up to 10TB Each, 3 USB Ports (2 USB 3.0, 1 USB 2.0)
 - 2 HDMI / 2 VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K564R8-V2

64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 64 Channel IP Camera Input
 - H.265/H.264/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5082/4K5162/4K5322-V2

8/16/32 Ch. 4K Network Video Recorder



- ▶ Features:
 - 8/16/32 Channel IP Camera Input
 - Instastream/H.264+/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 10TB Each, 2 USB(1 USB 3.0), 1 RS485, 1 RS232
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K564R4-V2

64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 64 Channel IP Camera Input
 - Instastream/H.264+/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / 1 VGA simultaneous video output
 - Support 4 SATA HDDs up to 32TB, 3 USB(1 USB 2.0), Single RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K664/4K6128R16-EV2

64/128 Ch. 4K Network Video Recorder



- ▶ Features:
 - 64/128 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - 2 HDMI / 1 VGA simultaneous video output
 - Support 16 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Spare, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K664/4K6128R8-EV2

64/128 Ch. 4K Network Video Recorder



- ▶ Features:
 - 64/128 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - 2 HDMI / 1 VGA simultaneous video output
 - Support 8 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Swap, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Project NVR Series

CP-UNS-7216DR-V2

Powerful Surveillance Management Centre



- ▶ Features:
 - Powerful Surveillance Management Centre
 - Supports up to 1000 video channels per server and it can extend the devices by distribution system
 - Auto-Register 500 devices and 1000 channels
 - Total Video Device and Channel 500 devices and 1000 channels
 - Support 15HDD disks (3.5") for Video or Picture storage (8TB per HDD)
 - Face Capture, ANPR Event with Picture, ANPR Vehicle Blocklist, Face Capture
 - Single, Raid 0/1/5/6/10

CP-UNR-4K632R8/4K664R8-V2

32/64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 32/64 Channel IP Camera Input
 - H.265/H.264 dual codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - Support 8 SATA HDDs up to 64TB, 4 USB ports, 1 eSATA port, Support RAID 0/1/5/6/10/50/60
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-7256R16-F4

Intelligent Video Surveillance Server



- ▶ Features:
 - 256-channel IP video access
 - Max 512 Mbps incoming bandwidth
 - Instastream; Smart H.264+; H.265; H.264
 - Up to 48-channel face recognition with normal IPC, Up to 160-channel face recognition with face detection IPC
 - Up to 48-channel video metadata, Up to 50 face databases with 500,000 face pictures in total
 - Supports RAID 0/1/5/6/10/50/60
 - 16HDD SATA Slots 3.0/SAS. Max. 16TB/HDD
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-7256R16D-EA

Intelligent Video Surveillance Server



- ▶ Features:
 - 256-channel IP video access
 - Max 768Mbps incoming bandwidth
 - Instastream/Smart H.264+/H.265/H.264
 - Support 3 HDMI/1 VGA video output
 - Supports RAID 0/1/5/6/10/50/60
 - 16HDD SATA Slots 3.0/SAS. Max. 16TB/HDD
 - Redundant Power Supply
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K532R8-V2

32 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 32 Channel IP Camera Input
 - H.265/H.264/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - 2 HDMI / VGA simultaneous video output
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R8-V2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 128 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10, 1 eSATA Port, 1 RS485, 1 RS232, Support Hot-Swap
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R16-V2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 128 Channel IP Camera Input
 - H.265/H.264/MJPEG dual-stream encoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port , Support 16 hot-swap HDDs
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R16-EV2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
 - 128 Channel IP Camera Input
 - H.265/H.264/MJPEG dual-stream encoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port , Support 16 hot-swap HDDs, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

PoE NVR

CP-UNR-4K4042-P4V3

4Ch. H.265 4K Network Video Recorder with 4PoE Port



- ▶ Features:
 - 4 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max. decoding capability: 4 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 4 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082-P8V3

8Ch. H.265 4K Network Video Recorder with 8 PoE Port



- ▶ Features:
 - 8 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 8 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4162-P16V3

16Ch. H.265 4K Network Video Recorder with 16 PoE Ports



- ▶ Features:
 - 16 channel IP camera input
 - Instastream/H.265/H.264+/H.264
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 16 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

INTELLIGENT GUARD+ SERIES



2 MP - Network Series

CP-UNC-DA21L2-GP-V2

2MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

CP-UNC-TA21L2-GP-V2

2MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

CP-UNC-DA21L2C-GP-V3

2MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L2C-GP-V3

2MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4MP - Network Series

CP-UNC-TA41L2C-GP

4 MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41L2C-GP

4 MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR,ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2.4 MP - Analog Series

CP-GPC-D24L2-S

2.4MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- ▶ Features:
- 1/2.9" 2.4MP CMOS Image sensor
- Max 25/30fps@2.4MP
- 3.6mm lens (6mm Optional)
- Support low illumination, warm light day night full color
- DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- Max. IR Range of 20 Mtr., IP66

CP-GPC-T24PL2-S

2.4MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- ▶ Features:
- 1/2.9" 2.4MP CMOS Image sensor
- Max 25/30fps@2.4MP
- 3.6mm lens (6mm Optional)
- Support low illumination, warm light day night full color
- DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- Max. IR Range of 20 Mtr., IP66

CP-GPC-DA24PL2-SE

2.4MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
 - Max. 30fps@2.4MP
 - 3.6mm Lens (2.8mm Optional)
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - Support Full-color Starlight

CP-GPC-TA24PL2-SE

2.4MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
 - Max. 30fps@2.4MP
 - 3.6mm Lens (2.8mm Optional)
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - Support Full-color Starlight

CP-GPC-T24L4-V5

2.4MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 40 Mtr., IP66

CP-GPC-TA24L5-SE

2.4MP Full-color Guard+ Bullet Camera - 50Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
 - Max. 25/30fps@2.4MP
 - 3.6mm Lens (2.8mm Optional)
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 50 Mtrs, Ip67
 - 24/7 color imaging

5MP - Analog Series

CP-GPC-T24L8-V5

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 8mm lens (6mm, 3.6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC-T24FL8-V5

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 2.8-12mm Varifocal Lens
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC-D50L2-S

5MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max 25/30fps@5MP
 - 3.6mm Lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Support Starlight Function
 - IR Range of 20 Mtrs, IP66

CP-GPC-DA50PL2-SE

5MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, IP67
 - 24/7 color imaging

CP-GPC-DA50PL2C-SE

5MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - Built-in Mic
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - 24/7 color imaging

CP-GPC-T50PL2-S

5MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max 25/30fps@5MP
 - 3.6mm Lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Support Starlight Function
 - IR Range of 20 Mtrs, IP66

CP-GPC-TA50PL2C-SE

5MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - Built-in Mic
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - 24/7 color imaging

CP-GPC-TA50PL2-SE

5MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, IP67
 - 24/7 color imaging

CP-GPC-D50L3-V5

5MP Full HD IR Guard+ Dome Camera - 30 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 30 Mtr., IP66

CP-GPC-T50L4-V5

5MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 40 Mtr., IP66

CP-GPC-TA50L5-SE

5MP Full-color Guard+ Bullet Camera - 50Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 6mm Lens
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 50 Mtrs, IP67
 - 24/7 color imaging

CP-GPC-T50L8-V5

5MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 8mm lens (6mm, 3.6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC-T50FL8-V5

5MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 2.8-12mm Varifocal Lens
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC-DA50L2-ME

5MP Full HD IR Guard+ Dome Camera - 20mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 20fps@5MP
 - 2.8mm Lens (3.6mm optional)
 - 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

CP-GPC-TA50L2-ME

5MP Guard+ Active Deterrence Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 20fps@5MP
 - 2.8mm Lens (3.6mm Optional)
 - 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

CP-GPC-TA50L2S-ME

5MP Guard+ Active Deterrence Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 20fps@5MP
 - 2.8mm Lens (3.6mm Optional)
 - Built-in PIR, 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

Multi Lens Camera with 180° View
Outdoor Area

1. Time & Attendance
2. People Counting
Bank Entrance

Fish Eye Camera
Reception / Lobby Area


Pin Hole & Dome Camera with Sensor Integration
ATM

Intelligent Surveillance for Banking

4 MP camera with Motion Alert
Vault Area

60fps Camera with Panic Button & Two-Way Communication
Cash Transaction Counter

SYSTEM ARCHITECTURE

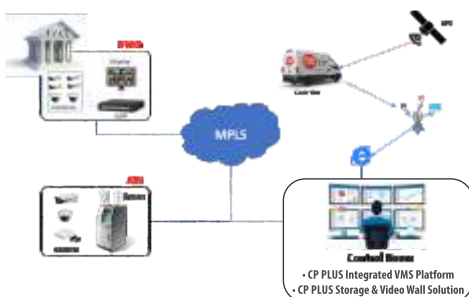

KEY FEATURES

- **180° Multi Lens Camera with 180° View & People Counting**
- **Face Recognition, People Counting & Ultra WDR Camera**
- **Remote Monitoring & Evidence Management**
- **Customer traffic statistics**
- **ATM Text Overlay**
- **Smart Transaction Record**
- **Sensor Integration**
- **Behaviour Analytics**



Home Security Camera



Video Door Phone




Power Supply



Time & Attendance



Cable



Video Storage



**A
PORTFOLIO
WITH A
TRULY
EXTENSIVE
RANGE OF
PRODUCTS**




**upar wala sab
dekh raha hai**

PROUDLY / MAKING IN INDIA

**HD DVR/NVR****HD CCTV Camera****Speed Dome****Surveillance Software****Explosion-Proof Cameras****Mobile DVR****Anti-Corrosion Cameras****Body Worn****POE Switches****Thermal Camera**

Get exactly what you require from the wide range of Premium Quality Security Solutions from the leading surveillance brand.

Our product portfolio has been meticulously crafted to cater to every requirement in implementing effective surveillance and reliable security. By understanding the rapidly changing as well as challenging needs of the time, we come up with unparalleled products that are affordable and have been designed for sustainable use.

VIDEO STORAGE



Video Storage

CP-UVS-6167R

16-HDD Enterprises Video Storage



- ▶ Features:
 - Max 512 IP Camera Inputs
 - 16 HDDs, SATA, Hot-Swap
 - Max 1024Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/ JBOD, Hotspare
 - Redundant Power Supply

CP-UVS-6247R

24-HDD Enterprise Video Storage



- ▶ Features:
 - Max 512 IP Camera Inputs
 - 24 HDDs, SATA, Hot-Swap
 - Max 1024Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/ JBOD, Hotspare
 - Redundant Power Supply

CP-UVS-G24R-D

24-HDD Enterprise Video Storage with Dual Controller



- ▶ Features:
 - Max 512 IP Camera Inputs
 - Dual Controller architecture
 - 24 HDDs, SAS, Hot-Swap
 - Max 1024Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/ JBOD, Hotspare
 - Redundant Power Supply
 - Support standard iSCSI Protocol Storage
 - 24 HDDs, Up to 10 TB capacity for each HDD

CP-UVS-6367R

36-HDD Enterprise Video Storage



- ▶ Features:
 - Max 320 IP Camera Inputs
 - 36 HDDs, SATA, Hot-Swap
 - Max 640 Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Redundant Power Supply
 - Supports RAID 0/1/3/4/5/6/10/50/60/ JBOD, Hotspare
 - 320-channel (640Mbps) incoming and recording, 160-channel (320Mbps) forwarding, 32-channel (64Mbps) playback

CP-UVS-6487R

48-HDD Enterprise Video Storage




- ▶ Features:
 - Max 320 IP Camera Inputs
 - 48 HDDs, SATA, Hot-Swap
 - Max 640Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/ JBOD, Hotspare
 - Redundant Power Supply
 - Support standard iSCSI Protocol Storage

CP-UVS-G48R-D2

48-HDD Embedded Video Storage



- ▶ Features:
 - Max 512 IP Camera Inputs
 - Max 1024 Mbps incoming/recording/forwarding bandwidth
 - Dual-controller, Active-Active, 64-bit High-performance multi-core processor
 - Supports RAID 0/1/5/6/10/50/60, JBOD, Hot spare
 - 1+1 redundant 80PLUS platinum power supply
 - Supports Automatic Network Replenishment (ANR), SAS cascade for expanded storage space

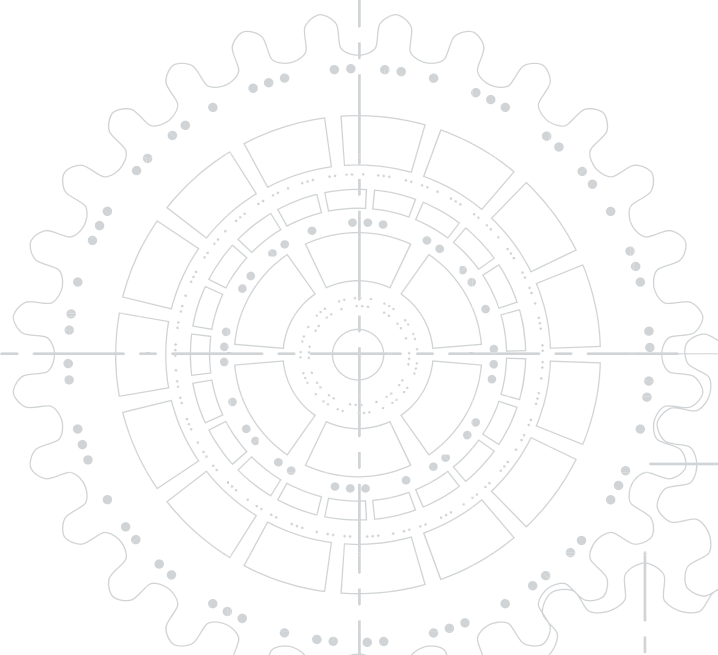

ALL-IN ONE HD SOLUTION



1 MP Series

CP-USC-TC10PL2-V3

1MP Full HD IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 1MP PS CMOS Image Sensor
 - Max 30fps@1MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR, Ip67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD and Two Analog format Output switchable

2.4 MP Series

CP-USC-DA24L2

2.4MP IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928x1088)
 - 3.6mm fixed lens (6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), AWB, AGC, BLC
 - Max. IR LEDs length 20m

CP-USC-TA24L2

2.4MP IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928x1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 20m, IP67

CP-URC-DC24PL2-V3

2.4MP Full HD IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
 - Max. 30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Lens (2.8mm, 6mm Optional)
 - Max. IR length 20 Mtr.
 - HD and SD output switchable

CP-URC-TC24PL2-V3

2.4MP Full HD IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
 - Max. 30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Lens (6mm Optional)
 - Max. IR length 20 Mtr., IP67
 - HD and SD output switchable

CP-USC-TA24L3-D

2.4MP WDR IR Bullet Camera - 30Mtr.



- Features:
- 1/2.9" 2.4MP PS CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - WDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - IR Range of 30 Mtrs., IP67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD, and Two Others Analog formats output switchable

CP-USC-TA24R8-D

2.4 MP WDR Array Bullet Camera - 80Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - WDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (6mm, 8mm optional)
 - IR Range of 80Mtrs., IP67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD and Two Analog format Output switchable

CP-USC-TA24ZL6

2.4MP Full HD IR Bullet Camera - 60Mtr.



- Features:
- 1/2.7" 2.4MP CMOS PS Image Sensor
 - Max. 30fps@2.4MP
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens
 - Max. IR length 60m, IP67, Smart IR
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD and SD output switchable

CP-USC-TA24L8C

2.4MP IR Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP (1928x1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 80m, Built-in Mic, IP67

CP-USC-TD24FL6-V3

2.4MP IR Bullet Camera - 60Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7mm~12mm Vari-focal Lens
 - IR Range of 60Mtrs., Smart IR, IP67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD and Two Analog format Output switchable

CP-USC-VA24ZR3

2.4MP IR Vandal Dome Camera - 30Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7mm~12mm Motorized Lens
 - IR Range of 30Mtrs., Smart IR, IP67, IK10
 - OSD Menu, control over coaxial cable, 2D-DNR
 - CVI/CVBS/AHD/TVI switchable

CP-URC-DC24PL2C-V3

2.4MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR
 - Support Built-in Mic
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD and Two Analog format Output switchable

5 MP Series

CP-URC-TC24PL2C-V3

2.4MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR, IP67
 - Support Built-in Mic
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD, SD and Two Analog format Output switchable

CP-USC-DC51PL2-V3

5MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs.
 - OSD Menu, control over coaxial cable, 2D-DNR
 - CVI/CVBS/AHD/TVI Switchable

CP-USC-DA50ZL6C-S

5MP Cosmic IR Dome Camera - 60Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens
 - Support Starlight Function
 - Max. IR length 60m, IP67, Smart IR
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

CP-USC-DC51ZL4-V3

5MP IR Dome Camera - 40Mtr.



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7mm ~ 12mm Motorized lens
 - IR Range of 40 Mtrs., IP67
 - CVI/CVBS/AHD/TVI Switchable

CP-USC-TC51PL2-V3

5MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., IP67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - CVI/CVBS/AHD/TVI Switchable

CP-USC-TA50ML3-S

5MP IR Bullet Camera



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 30Mtrs., Smart IR, IP67
 - CVI/CVBS/AHD/TVI switchable
 - Support Starlight Function

CP-USC-TA50L5-S

5MP IR Bullet Camera



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (6mm optional)
 - IR Range of 40-50Mtrs., Smart IR, IP67
 - CVI/CVBS/AHD/TVI switchable
 - Support Starlight Function

CP-USC-TA50ZL6C-S

5MP IR Bullet Camera



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7mm~12mm Motorized Lens
 - Support Built-in Mic
 - IR Range of 60Mtrs., Smart IR, IP67
 - CVI/CVBS/AHD/TVI switchable
 - Support Starlight Function

CP-USC-DA50ZL6C-DS

5MP Full HD WDR IR Cosmic Dome Camera - 60Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 20fps@5MP
 - WDR(100dB), Day/Night(ICR), 2D-DNR, AWB, AGC, BLC,HLC
 - 2.7-12mm Motorized lens
 - Max. IR length 60m, IP67, Smart IR, Built-in mic
 - Support Starlight Function
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD and SD output switchable

CP-USC-TA50ZL6C-DS

5MP Full HD WDR IR Cosmic Bullet Camera - 60Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 20fps@5MP
 - WDR(100dB), Day/Night(ICR), 2D-DNR, AWB, AGC, BLC,HLC
 - 2.7-12mm Motorized lens
 - Max. IR length 60m, IP67, Smart IR, Built-in mic
 - Support Starlight Function
 - OSD Menu, control over coaxial cable, 2D-DNR
 - HD and SD output switchable

CP-USC-TA50L3-S

5MP IR Bullet Camera - 30Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm optional)
 - IR Range of 30Mtrs., Smart IR, IP67
 - Support Starlight Function
 - CVI/CVBS/AHD/TVI switchable

CP-USC-DC51PL2C

5MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

FishEye

CP-USC-TC51PL2C

5MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., IP67
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

CP-USC-TA50L8C-S

5MP IR Bullet Camera - 80Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm, 6mm, 8mm optional)
 - IR Range of 80Mtrs., Smart IR, IP67
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

CP-USC-TC51ZL6-V3

5MP IR Bullet Camera - 60Mtr.



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-NR, AWB, AGC, BLC, HLC
 - 2.7mm ~ 12mm Motorized lens
 - IR Range of 60 Mtrs., Smart IR, IP67
 - CVI/CVBS/AHD/TVI Switchable

CP-UVC-EB50L1C-D

5MP WDR IR HDCVI FishEye Camera - 10 Mtr.



- Features:
- 1/2.8" 5MP progressive scan CMOS
 - Max. 20fps@5MP
 - WDR(120dB), Day/Night (ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - Panoramic fisheye lens
 - OSD Menu, control over coaxial cable, 2D/3D-DNR
 - Support Built-in Mic
 - IR Range of 10 Mtr., Smart IR

IoT Series

CP-USC-FA20-M

2 MP MotionEye Camera



- Features:
- 2 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 25/30fps@2MP
 - 2.8mm fixed lens
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Built-in tamper switch

CP-USC-FA20-MW

2 MP MotionEye Camera



- Features:
- 2 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 25/30fps@2MP
 - 2.8mm fixed lens
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Built-in tamper switch

HDCVI Series

CP-UVC-TC4K08ZL10-VD

8 MP WDR HDCVI IR Bullet Camera - 100 Mtr.



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@8MP
 - 3.7-11mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 100 Mtrs., IP67, IK10

CP-UVC-TC4K08ZL10H-VD

8 MP WDR HDCVI IR Bullet Camera - 100 Mtr.



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@8MP
 - 3.7-11mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 100 Mtrs., IP67, IK10

CP-UVC-VC4K08ZL5-VD

8 MP WDR HDCVI IR Vandal Dome Camera - 50 Mtr.



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@8MP
 - 3.7-11mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10

CP-UVC-VC4K08ZL5H-VD

8 MP WDR HDCVI IR Vandal Dome Camera - 50 Mtr.



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@8MP
 - 3.7-11mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10

CP-UVC-BC4K08C-D

8 MP WDR HDCVI Box Camera



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - HDMI:4K@30fps, BNC :4K@15fps
 - M43 Lens
 - WDR(140dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - Built-in Mic

CP-UVC-EC4K08L2C-D

8 MP WDR HDCVI IR Fisheye Camera - 15 Mtr.



- Features:
- 8 MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@8MP
 - 2.5mm Lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 15 Mtrs., Built-in Mic, IP67, IK10

2.4 MP Series

CP-UVC-RC4K08L2-VD

3X2MP Multi-Lens Panoramic WDR HDCVI IR Camera - 20 Mtr.



- Features:
- Three 1/2.8" 2MP PS CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 15fps@4K, 25fps@4MP
 - 3.6mm Lens
 - WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs., IP67, IK10

CP-VAC-D24L2-V5

2.4 MP Full HD IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP HD Color Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@2.4MP
 - 3.6mm fixed Lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
 - IR Range of 20 Mtr.

CP-VAC-T24PL2-V5

2.4 MP Full HD IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP HD Color Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@2.4MP
 - 3.6mm fixed Lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
 - IR Range of 20 Mtr., IP66

CP-VAC-T24R5-V5

2.4 MP Full HD Array Bullet Camera - 50 Mtr.



- Features:
- 1/2.7" 2.4 MP HD Color Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@2.4MP
 - 6mm Lens (8mm Optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
 - Array Range of 50 Mtr., IP66

H.265 1SATA Series

CP-UVR-0401/0801/1601E1-HC

4/8/16 Ch. 1080P Lite H.265 DVR



- Features:
- 4/8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 2/6MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801/1601E1-IC

4/8/16Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 5/10/18 channels IP camera inputs, each channel up to 2/6MP; Max 20/40/72Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 6TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801/1601F1-IC

4/8/16Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 6/12/24 channels IP camera inputs, each channel up to 6MP; Max 32/64Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 16TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401L1-4K13

4Ch. 4K-N/5MP Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP signals
 - Support each channel upto 8MP IP Camera
 - Max 64Mbps Incoming Bandwidth
 - 1 SATA port, up to 16TB, 2 USB Ports
 - AI Instastream, Instastream, H.265 dual-stream Video Compression
 - Up to 1 channel video stream (analog channel) human face recognition, Up to 4 channels video stream (analog channel) Perimeter Protection
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0801L1-4KV2

8 Ch. 4K Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 12 channels IP camera inputs, each channel up to 8MP
 - Max 48Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 8TB, 2 USB Ports
 - HDMI / VGA Simultaneous Video Output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0808/1616K1-I3

8/16 Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 12/24 channels IP camera inputs, each channel up to 6MP; Max 64/128Mbps incoming bandwidth
 - AI Instastream/Instastream/ H.265 dual-stream encoding
 - Up to 1/2 channels video stream (analog channel) human face recognition, Up to 8/16 channels video stream (analog channel) SMD Plus.
 - Support 1 SATA HDDs up to 16TB each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801E1-CV2

4/8Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 5/10 channels IP camera inputs, each channel up to 2MP/6MP; Max 20/40Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 6TB, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265/H.264+/H.264 video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601E2-I

16Ch. 1080P Lite Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth
 - Supports Full-channel AI-Coding
 - Support 2 SATA HDD up to 10TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265 video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.264 2SATA Series

CP-UVR-1601K1-V5

16Ch. 1080P Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 5MP IP Camera
 - All Channel 1080P Lite Realtime or 1080P non-realtime recording
 - H.264+ /H.264 dual-stream Video Compression
 - HDMI / VGA Simultaneous Video Output
 - Support 1 SATA HDD up to 8TB, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601L2-4K

16 Ch. 4K Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Max 96Mbps Incoming Bandwidth
 - H.264+ /H.264 dual-stream Video Compression
 - HDMI / VGA Simultaneous Video Output
 - Support 2 SATA HDD up to 16TB, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 2SATA Series

CP-UVR-1601K2-I3

16Ch. 5M-N/1080P Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
 - Instastream/ H.265 dual-stream video compression
 - Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601/3201E2-H

16/32 Ch. 1080P Lite H.265 DVR



- Features:
- 16/32 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - H.265 video compression
 - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3201E2-I

32 Ch. 1080N/720P Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 16 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth.
 - Supports 8-channel AI Instastream
 - AI Instastream/ Instastream/ H.265 dual-stream video compression
 - Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3201K2-I3

32 Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps incoming bandwidth
 - AI Instastream/ Instastream/ H.265 dual-stream video compression.
 - Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4K 1SATA Series

CP-UVR-0401/0801/1601L1B-4KH

4/8/16 Ch. 4K H.265 DVR



- Features:
- 4/8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 1 SATA port up to 10TB, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801L1-4KH

4/8 Ch. 4K H.265 DVR



- Features:
- 4/8 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 1 SATA port up to 10TB, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4K 2SATA Series

CP-UVR-0801/1601L2-4KH

8/16 Ch. 4K H.265 DVR



- Features:
- 8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4/8SATA Series

CP-UVR-0804/1604/3204K4-H

8/16/32 Ch. Digital Video Recorder



- Features:
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6/8MP IP Camera
 - Max 48/96/128Mbps Incoming Bandwidth
 - Instastream/ H.265 dual-stream Video Compression
 - HDMI / VGA Simultaneous Video Output
 - Support 4 SATA HDD up to 10TB Each, 3 USB Ports
 - 4/8/16 channels support Tripwire and Intrusion; First 2 channels support Object Abandoned and Missing
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3216K8-H

32 Ch. 1080P H.265 DVR



- Features:
- 32 Ch. Video, 16 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 8 SATA port up to 10TB Each, 4 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.264 Series

CP-UVR-0401/0801E1-CS

4/8 Ch. 1080P Lite DVR



- Features:
- 4 /8Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 2MP IP Camera
 - 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

BODY WORN SOLUTION



Body Worn Camera

CP-UBC-2147

Body Worn Camera



- ▶ Features:
 - Android 9.0
 - 2.0" touch screen
 - 8-core 1.8 GHz High-Performance CPU
 - Supports 1080p@30 fps recording, the image resolution up to 34MP
 - H.265/H.264 high compression coding.
 - Support 2G/3G/4G Cellular network, Wi-Fi, Bluetooth, NFC, GPS/GLONALL
 - Power saving mode optional, pre-record and post-record up to 60s.
 - 16GB internal storage and support external SD card
 - One press to record video/audio/alarm/PTT
 - Supports IP68, drop test 2 meters.

CP-EDS-Y08

8 Port Docking Station with Screen



- ▶ Features:
 - 10 inches touch screen with resolution of 1920 x1200.
 - Support 8 channel camera for backup and recharge.
 - Support 1GB Ethernet port for data uploading.
 - Fast data export and battery recharge.
 - Support Android system.
 - Support upload data to the center FTP server

CP-EBC-1073-K

4K Body Worn Camera



- ▶ Features:
 - Support 4K resolution for recording
 - 2.4 inch touch screen supported
 - H.265/H.264 video compression
 - Support built-in 4G for live video transmission
 - Support built-in Wi-Fi for uploading
 - Support built-in GPS for live tracking
 - Support optional G-sensor and Gyro
 - Support front and back two cameras
 - Hot-swappable 3050mAh lithium battery
 - Built-In storage can extend to 256GB
 - Support Network PTT function

CP-DDS-N08

8 Port Docking Station



- ▶ Features:
 - 8 Port docking station for simultaneous video backup and charging
 - There are connection indicator on each port. Each port output current 1.2A
 - Interface- USB 2.0 for charging and backup and power switch power cable for dock station
 - 8pcs water proof mini USB ports
 - Dock station casing is metal and black paint craft with Hanging bracket

CP-DBP-H20

Full HD Body Worn Camera



- ▶ Features:
 - 1080P color Video Recording
 - 1.8m drop test
 - Easy one-touch recording
 - 2" LCD screen with instant playback of video, photos or audio
 - Built-in high-quality microphone and speaker
 - 16GB/32GB/64GB/128GB Internal storage
 - IP65

CP-UDS-N08

Data Collection Station/Data Collection Module



- ▶ Features:
 - Each CP-UDS-N08 contains 8 docks which can connect body camera CP-UBC-2147.
 - Each dock contains a cable with micro USB 2.0 interface.
 - Electronic lock design for each dock which can be unlocked only by authorized user.
 - Mechanical lock at the bottom which can be used to unlock docks.
 - Total bandwidth up to 128MB/s for data collection.
 - Two LED indicators on each dock which used to show the charging status and data collection status.

Data Management Terminal

CP-EDS-N06

6 Port Docking Station



- ▶ Features:
 - Support totally 10 cameras for backup simultaneously.
 - Support to charge totally 10 cameras at the same time.
 - Support to upload all the files to the center server manually or timing.
 - Support to export all the video files from body camera to local PC.
 - Support device password modification
 - Compatible with different models of body worn camera.

CP-UA-M13T-R

Data Collection Station/Control Module



- ▶ Features:
 - Supports separate installation and removal. One control module can be connected to 4 data collection modules (32 MPTs).
 - With 13.3" 1920 × 1080 HD capacitive touch screen, it is easy to operate
 - Unlock the dock by face, fingerprint and password.
 - Built with a micro USB 2.0 interface; supports using retractable USB cable which can be replaced without opening the collection station.
 - With built-in lithium battery, when fully charged, you can unlock all docks at least once after the control module is powered off for 10 consecutive days.
 - Supports up to 6 HDDs of 10TB, and Raid 0/1/5/10.

MOBILE DVR/ NVR SOLUTION



Mobile DVR

CP-UVR-0401F1-PGI

4 Ch. H.265 AI Mobile Video Recorder



- ▶ Features:
 - Supports 4-ch 2MP analog cameras and 4-ch 2MP IP cameras input
 - Support Instream/H.265 video compression
 - Support Penta-Brid (HDCVI/AHD/TVI/CVBS/IP) video input
 - Aviation connectors adopted
 - Support 1 HDD and 1 SD card, 3 USB Ports (2.0)
 - Supports DSM/ADAS/BSD
 - Support GPS and 3G/4G
 - VGA/TV (Din Connector) simultaneous video output
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

CP-UVR-0401F2-PGI

4 Ch. H.265 AI Mobile Video Recorder



- ▶ Features:
 - Supports 4-ch 2MP analog cameras and 1-ch 2MP IP cameras input
 - Support Instream/H.265 video compression
 - Aviation connectors adopted
 - Supports 2 SD cards (up to 256 GB for each), 2 USB Ports(2.0)
 - Supports DSM/ADAS/BSD
 - Support GPS and 3G/4G
 - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

Mobile NVR

CP-UNR-404T1/408T2-AI

4/8 Ch. PoE H.265 AI Mobile Network Video Recorder



- ▶ Features:
 - Supports 4/8 Ch. 2MP PoE IP cameras input
 - Support Instream/H.265 video compression
 - Aviation connectors/ RJ45(Optional)
 - Support 1/2 HDD and 1 SD card, 3 USB Ports (2.0)
 - Supports DSM, face recognition or ANPR
 - Support GPS, Wi-Fi and 3G/4G
 - VGA/TV simultaneous video output
 - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

Mobile Camera

CP-USC-WB24L2C-D

2.4MP Full HD IR Mobile Wedge Camera - 20Mtr.



- ▶ Features:
 - 1/2.8" 2.4MP CMOS Image Sensor (0.9071 centimeters)
 - Max 30fps@2.4MP
 - WDR(120dB), Day/Night(ICR), 3D/2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR, IP67, IK10
 - IP6K9K, Shock-proof
 - Audio in interface, Support Built-in Mic
 - HDCVI output (Aviation connector)
 - HD, SD and Two Analog format Output

CP-USC-CC24L2C

2.4MP Mobile Cube Camera



- ▶ Features:
 - 1/2.7" 2.4 MP Progressive CMOS Image Sensor(0.9407cm)
 - Max 30fps@2.4MP
 - CVI/CVBS/AHD/TVI switchable
 - 2.8mm fixed lens (2.1mm optional)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Built-in Mic
 - IR Max. length 20m, Smart IR
 - Built-in 1/1 alarm in/out
 - IP67, Shock-proof

CP-UNC-WC21L5C-MDS

2MP Full HD WDR IR Network Wedge Camera



- ▶ Features:
 - 1/2.8" 2MP CMOS Image Sensor
 - Instream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.8 mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro
 - M12 Connector

CP-UNP-M3020L15-V2

2 MP Full HD Network Mobile Positioning System



- ▶ Features:
 - 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
 - Max. 25/30fps@1080P
 - Powerful 30x Optical Zoom
 - DWDR, 2D/3D DNR, AGC, AWB, BLC,HLC
 - 4.5mm ~ 135mm Lens
 - IR Distance up to 150 Mtr., IP66
 - Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-3020R1

2 MP Full HD IP Mobile Portable PTZ Camera



- ▶ Features:
 - 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
 - Pan range: 360° endless, speed up to 90°/s
 - Powerful 30x Optical Zoom
 - Supports Micro SD Card Upto 128 GB
 - 4.5mm ~ 135mm Lens
 - IR Distance up to 100 Mtr., IP66
 - Up to 256 Presets, 8 Tour
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

PoE SWITCHES



10/100 Unmanaged PoE Switch

CP-ANW-HP4H2-N65

4EP + 2E 10/100Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP/CPE and IP/PTZ camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Support 60W PoE receiving power, free of power adapter & simplify power supply
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection

CP-DNW-HPU4H2-48

6 Ports Switch with 4 PoE Ports & 2 Uplink Ports



- ▶ Features:
 - 6 Ports Switch with 4 PoE Ports & 2 Uplink Ports
 - Support IEEE802.3i/802.3u/802.3x
 - 2, 100Mbps, Transmission Distance: 0-100m
 - PoE Standard IEEE802.3af, IEEE802.3at
 - PoE Power Budget 48W

CP-DNW-HPU8H2-96

10 Ports Switch with 8 PoE Ports & 2 Uplink Ports



- ▶ Features:
 - 8, 100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x
 - 2, 100Mbps, Transmission Distance: 0-100m
 - PoE Standard IEEE802.3af, IEEE802.3at
 - PoE Power Budget 96W

CP-ANW-HP8H1-N12

8EP + 1E 10/100Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection

10/100/1000 Unmanaged PoE Switch

CP-DNW-GPU4G2-48

6 Ports Switch with 4 Gigabit PoE Ports & 2 Gigabit Uplink Ports



- ▶ Features:
 - 4, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x/802.3ab
 - Uplink Port: 2, 1000Mbps; Transmission Distance: 0-100m
 - PoE Power Budget: 48W

CP-DNW-GPU8G2-96

10 Ports Switch with 8 Gigabit PoE Ports & 2 Gigabit Uplink Ports



- ▶ Features:
 - 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
 - 2, 1000Mbps; Transmission Distance: 0-100m
 - PoE Power Budget: 96W

CP-DNW-GPU8G2F2-96

10 Ports Switch with 8 Gigabit PoE Ports & 2 Gigabit Uplink Ports, 2 SFP Ports



- ▶ Features:
 - 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port, 2x1000Mbps RJ45 ports
 - Supports 2x1000Mbps SFP Port
 - Supports IEEE802.3i/802.3u/802.3x/802.3af/802.3ab/IEEE 802.3z
 - Transmission Distance: default: 0-100m
 - Easy and safe installation

CP-ANW-GPU16F2-N30

16 Gigabit Port + 2SFP 10/100/1000Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart.
 - Upload port automatic flip (Auto MDI/MDIX)
 - Network performance: Store-and-forward
 - Intelligent power distribution and secure power supply system
 - The port power is 60 watts, it is convenient for high-power device
 - Power Budget 300W

CP-ANW-GPU24F2-N30

24 Gigabit Port + 2 SFP 10/100/1000Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP Camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI/MDIX)
 - Network performance: Store-and-forward
 - Intelligent power distribution and secure power supply system
 - The port power is 60 watts, it is convenient for high-power device
 - Power Budget 300W

CP-ANW-HP16G2F1-N30

16EP+2G+1SFP AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - FE ports can support 250 meters long distance transmission automatically
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
 - The port Max power Output is 60 watts, it is convenient for high-power device
 - Power Budget 300W

CP-ANW-HP24G2-N30

24EP+2G AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP/CPE and PTZ/IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
 - Max. output power of the port is 60 watts, it is convenient for high-power device
 - Power Budget 300W

10/100/1000 Managed PoE Switch

CP-ANW-GPM8F2-N12

8 Port Gigabit + 2 Port Gigabit SFP Layer 2 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.3i IEEE 802.3u IEEE802.3ab IEEE802.3z IEEE802.3x IEEE802.3at IEEE802.3af IEEE802.3az
 - 8 x Gigabit PoE+ Ports and 2 x Gigabit SFP
 - Supports MAC address auto learning and auto aging
 - Supports PoE power up to 30W for each PoE port, all power up to 120W
 - LED indicators for monitoring power, link/activity
 - Support QoS, port mirroring, link aggregation protocol

Gigabit Network Switch

CP-ANW-GPM24G4F4-N40

24 Port Gigabit + 4 Port Gigabit SFP Layer 2 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.3i, IEEE 802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x, IEEE802.3at, IEEE802.3af, IEEE802.3az
 - 24 x Gigabit PoE+ Ports and 4 x Gigabit Combo
 - Supports MAC address auto learning and auto aging
 - Supports PoE power up to 30W for each PoE Port, all power up to 400W
 - LED indicators for monitoring power, link/activity
 - Store and forward mode operates.
 - Power Budget 400W

CP-ANW-GS105-M

5 Port 10/100/1000Mbps Gigabit Switch



- ▶ Features:
 - Transmission Distance up to 100Meters, speed up to 1,000 Mbps
 - 10/100/1000Mbps Auto-Negotiation 5 RJ45 ports, Add up to five devices to a local network
 - Supporting Auto-MDI/MDIX
 - Supports MAC address auto-learning and auto-aging
 - LED indicators for monitoring power, link, activity
 - Low Power Consumption

CP-ANW-GS108-M

8 Port 10/100/1000Mbps Gigabit Ethernet Switch



- ▶ Features:
 - Transmission Distance up to 100Meters, speed up to 1,000 Mbps
 - 10/100/1000Mbps Auto-Negotiation 8 RJ45 ports, Add up to eight devices to a local network
 - Supporting Auto-MDI/MDIX
 - Supports MAC address auto-learning and auto-aging
 - LED indicators for monitoring power, link, activity
 - Low Power Consumption

Secure what you love

CONSUMER IoT SERIES

EzyKam Home Camera



Smart Wi-Fi Video Door Bell



Smart Wi-Fi Router



USB Chime



Smart Gas Leak Detector




Smart Smoke Sensor



Smart Door Sensor



CONSUMER SERIES

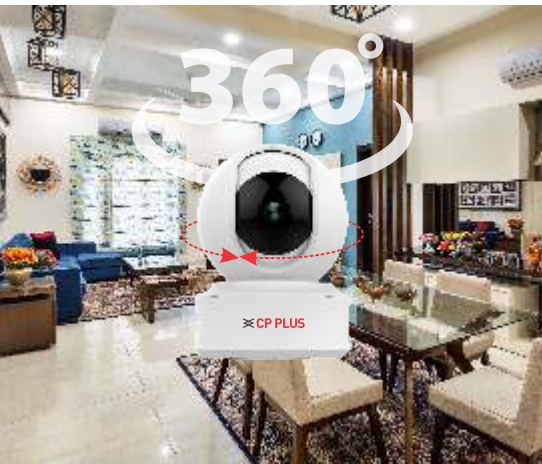

2 MP Series

CP-E21A

2 MP Wi-Fi PT Camera – 15 Mtr.



- ▶ Features:
- 1/2.7" 2MP CMOS Image Sensor
- 2.8mm Lens
- H.264/H.265 Video Compression
- Wi-Fi Support
- Max 20fps@1080P
- IR Distance of 15 Mtr.
- Works with Alexa
- Works with Google Assistant

CP-E24A

2 MP Wi-Fi PT Camera – 15 Mtr.



- ▶ Features:
- 1/2.7" 2MP CMOS Image Sensor
- 3.6mm Lens
- H.264/H.265 Video Compression
- Wi-Fi Support
- Max 20fps@1080P
- IR Distance of 15 Mtr.
- Works with Alexa
- Works with Google Assistant

CP-E25A

2MP Wi-Fi PT Camera - 10 Mtr.



- ▶ Features:
- 1/4.5" 2MP CMOS Image Sensor
- 4mm Lens
- H.264 Video Compression
- Support SD Card up to 128GB
- IR Distance of 10 Mtr.
- Max. 20fps@1080P
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

3 MP Series

CP-E31A

3MP Wi-Fi PT Camera - 15 Mtr.



- ▶ Features:
- 1/3" 3MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Wi-Fi Support
- Max. 20fps@3MP
- IR Distance of 15 Mtr.
- Works with Alexa
- Works with Google Assistant

3 MP 4G Series

CP-E34A

3MP Wi-Fi PT Camera - 15 Mtr.



- ▶ Features:
- 1/3" 3MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Wi-Fi Support
- Max. 20fps@3MP
- IR Distance of 15 Mtr.
- Works with Alexa
- Works with Google Assistant

CP-E35A

3MP PT Wi-Fi Camera - 10 Mtr.



- ▶ Features:
- 1/3" 3MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Support SD Card up to 128GB
- IR Distance of 10 Mtr.
- Max. 20fps@3MP
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

CP-V32G

3MP 4G Camera



- ▶ Features:
- 1/3" 3MP CMOS Image Sensor
- 4mm Lens
- H.265/H.264 Video Compression
- Support Micro SD Card up to 256GB
- IR Range up to 20-30mtr, spotlight 15mtr., IP66
- Max. 15fps@3MP
- Support RJ45 Port and 4G Sim
- With Infrared and spotlight, support three night vision modes, adjustable to achieve full color at night

CP-Z32G

3MP 4G Pan/Tilt Camera



- ▶ Features:
- 1/2.8" 3MP CMOS Image Sensor
- 4mm Lens
- H.265/ H.264 Video Compression
- Support Micro SD Card up to 256GB
- IR Range up to 20-30mtr, White light 15-20mtr.
- Max. 15fps@3MP
- Support RJ45 Port and 4G Sim
- Support Human Detection
- IP66 waterproof, 4000V lightning protection, anti-surge

4 MP Series

CP-E41A

4MP Wi-Fi PT Camera - 15 Mtr.



- ▶ Features:
- 1/2.8" 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Support SD Card up to 128GB
- IR Distance of 15 Mtr.
- Max. 20fps@4MP
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

CP-E44A

4MP Wi-Fi PT Camera - 15 Mtr.



- ▶ Features:
- 1/2.8" 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Wi-Fi Support
- Max. 20fps@4MP
- IR Distance of 15 Mtr.
- Works with Alexa
- Works with Google Assistant

CP-V41A

4MP Wi-Fi Camera - 15 Mtr.



- ▶ Features:
- 1/2.8" 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Wi-Fi Support
- IR Distance of 15 Mtr., IP66
- Works with Alexa
- Works with Google Assistant

CP-V47A

4MP Wi-Fi Camera - 10 Mtr.



- ▶ Features:
- 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Support SD Card up to 128GB
- IR Distance of 10 Mtr.
- Max. 20fps@4MP
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

Floodlight Camera

CP-Z41A

4MP Wi-Fi PT Camera - 20 Mtr.



- ▶ Features:
- 1/2.8" 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Support SD Card Upto 128GB
- IR Range of up to 20 Mtr.
- Pan/Tilt Range: Horizontal - 355°, Vertical - 110°
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

CP-Z43A

4MP Wi-Fi PT Camera - 10 Mtr.



- ▶ Features:
- 1/2.8" 4MP CMOS Image Sensor
- 4mm Lens
- H.265 Video Compression
- Support SD Card Upto 128GB
- 8 Pcs IR light, IR distance: 8-10Mtr., 8 Pcs Spotlight, Spotlight distance: 8-10Mtr.
- Max. 20fps@4MP
- Wi-Fi Support
- Works with Alexa
- Works with Google Assistant

CP-F41A

4MP Wi-Fi Floodlight Camera



- ▶ Features:
- 4MP Resolution
- H.265 Video Compression
- Angle of View 110°
- 6~12 Mtr PIR Distance
- Support Wi-Fi

CP-F42A

4MP Wi-Fi Floodlight Camera



- ▶ Features:
- 4MP Resolution
- H.265 Video Compression
- Angle of View 110°
- 6~12 Mtr PIR Distance
- Support Wi-Fi

Wi-Fi Sensor

CP-HAS-D33-W

Smart Wi-Fi Door Sensor



- ▶ Features:
- Support Wi-Fi Protocol: IEEE 802.11 b/g/n
- Detection Distance: 20-30mm
- Wi-Fi Networking: 2.4GHz
- Report alarms to smart phone in real time
- Installation can be done on Window and Doors

CP-HAS-GM03-W

Smart Wi-Fi Gas Detector



- ▶ Features:
- Highly Stable Gas Sensor
- Voice Prompt Support
- Report alarms to smart phone in real time
- Support Wi-Fi
- Plug & Play

CP-HAS-S1-W

Smart Wi-Fi Smoke Sensor



- ▶ Features:
- Alarm: When smoke concentration is detected, Red LED will flash quickly and the buzzer will give out with a quick alarm. It will also send alarms to connected smartphones in real-time.
- Hush: When the smoke alarm is ringing, press the hush button and the device will enter hush mode for about 10 minutes.
- Low Battery: When the battery is low, the red LED will flash once and the smoke alarm will issue the warning sound once every 53 seconds.

CP-HAS-M99-W

Smart Motion Sensor



- ▶ Features:
- Detection Angle: 90°
- Detecting Distance: Max. 9m under 25°C (detecting distance will be different, depending on environment temperature)
- Wi-Fi Protocol: IEEE 802.11 b/g/n
- Networking: Wi-Fi-2.4GHz
- Pet Protection Level: 11kg or less
- Working Temperature: -10°C ~ +50°C

Eezo Series

CP21

2MP Wi-Fi Pan & Tilt Camera - 10 Mtr.



- ▶ Features:
- 1/2.7" 2MP Progressive CMOS Image Sensor
- 3.6mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic & Speaker
- Max. 25/30fps@1080P
- Night Vision of 10 Mtr.

CB21

2MP Wi-Fi Camera - 10 Mtr.



- ▶ Features:
- 1/2.7" 2MP CMOS Progressive Image Sensor
- 2.8mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic & Speaker
- Max. 25/30fps@1080P
- Night Vision of 10 Mtr.

CT21

2MP Wi-Fi Bullet Camera - 30 Mtr.



- ▶ Features:
- 1/2.8" 2MP Progressive CMOS Image Sensor
- 2.8mm/3.6mm/6mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic
- Max. 25/30fps@1080P
- Support Ip67
- Night Vision of 30 Mtr.

CT22

2MP Wi-Fi Full Color Bullet Camera - 30 Mtr.



- ▶ Features:
- 1/2.8" 2MP Progressive CMOS Image Sensor
- 2.8mm/3.6mm/6mm Fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Support Built-in Mic
- Max. 25/30fps@1080P
- Support Ip67
- Night Vision of 30 Mtr.

SMART 4G ROUTER/ DOOR BELL/MONITOR



4G Router

CP-GR-DE412

4G Router



► Features:

- Support IEEE 802.3 (Ethernet), IEEE 802.3u (Fast Ethernet), IEEE 802.11b/g/n (2.4G WLAN)
- Wireless security - WPA/WPA2 security mechanism (WPA-PSK uses TKIP or AES)
- Indicator light - 6 Groups: Power, Wi-Fi, 4G, WAN, LAN1, LAN2
- Support 4G Features
- Support RF Parameters 802.11b/g/n: 2.4~2.4835GHz

CP-GR-DE413-S

4G Router



► Features:

- Support IEEE 802.3 (Ethernet), IEEE 802.3u (Fast Ethernet), IEEE 802.11b/g/n (2.4G WLAN)
- Wireless security - WPA/WPA2 security mechanism (WPA-PSK uses TKIP or AES)
- Indicator light - 6 Groups: Power, Wi-Fi, 4G, WAN, LAN1, LAN2
- Support 4G Features
- Support RF Parameters 802.11b/g/n: 2.4~2.4835GHz

CP-XR-DN211-S

4G Router



► Features:

- Compatible with WCDMA, FDD-LTE, TDD-LTE Default 802.11b/g/n
- LTE: B1/3/5/7/8/20/38/40/41 WCDMA: B1/5/8
- Support Wi-Fi 2.4G, Wi-Fi 2x2 MIMO, 802.11 b/g/n
- Support Internal antenna
- Support Reset, WPS

Door Bell

CP-L23

Wi-Fi Door bell



► Features:

- 2MP Full HD Video
- Super Wide View Angle
- Two-way Communication
- Support Built-in Mic
- Support IP65, IK07
- Support Micro SD Card 128GB
- Works with Alexa & Google Assistant (Wi-Fi Doorbell)
- USB Chime for Wi-Fi Doorbell

CP-UEM-19AH

19" Monitor



► Features:

- Light and cost-effective plastic housing
- High fidelity digital processing for a brilliant and vivid video
- 5ms fast response time with no image blurring or ghosting
- Low energy consumption, long service life

CP-UEM-22AH

22" FHD Monitor



► Features:

- 178°H/178°V extra-wide viewing angle for overall viewing performance
- The refresh rate can reach up to 75Hz to enhance the user experience
- High fidelity digital processing for a brilliant and vivid video
- Support multiple signal inputs including HDMI and VGA
- Anti-blue light design, eye-protective


INTELLIGENT VIDEO DOOR PHONE



Villa Kit Range

CP-UVK-701A


Video Intercom Kit



- ▶ Features:
 - 7" TFT screen
 - Video intercom function: Unlock, voice call, video call, volume adjustment
 - System Capacity: 2 door stations + 3 indoor monitors
 - Multiple bell sounds
 - Supports digital wide dynamic range (DWDR)

CP-UVK-701MTA

Video Intercom Kit with Memory



- ▶ Features:
 - 7" TFT screen
 - Video intercom function: Unlock, voice call, video call, volume adjustment, doorway monitoring
 - System Capacity: 2 door stations + 3 indoor monitors
 - Multiple bell sounds
 - Supports digital wide dynamic range (DWDR)
 - In-Built Memory (200 Snapshots)

CP-UVK-711M

IP Villa Door Station & Indoor Monitor



- ▶ Features:
 - High definition camera; WDR
 - IP65 (Silicone sealant is needed. For details, see the quick start guide.)
 - Supports auto IR illumination and D/N
 - Card/app remote/indoor monitor unlock
 - Supports two-way voice call; support calls between door stations and app
 - 10,000 cards

- IP Indoor Monitor
- IPC surveillance
 - Alarm integration
 - High performance

CP-PVK-70TH

7" Color Video Door Phone Kit 7" Colour TFT-LCD Display



- ▶ Features:
 - 4 Wire System, Easy Installation
 - Feather-touch Keypad
 - Super Slim hands-free Model
 - High Resolution Colour Camera 700TVL, With IR LED for Night Vision
 - Rain Cover & Mount Angle Available
 - Support Additional 3 Indoor Units & 2 Outdoor Units, 1 CCTV In
 - Supports Intercom
 - Color Settings Adjustments

Multi-Villa Range

CP-PVK-70MTH1

7" Color Video Door Phone Kit With Memory



- ▶ Features:
 - 7" Colour TFT-LCD Display
 - Feather-touch Keypad
 - Super Slim hands-free Model With Memory (100 Snapshots)
 - High Resolution Colour Camera 700TVL, With IR LED for Night Vision
 - Rain Cover & Mount Angle Available
 - Support Additional 3 Indoor Units & 2 Outdoor Units, 2 CCTV In
 - Supports Intercom
 - 1 CCTV Out for Recording
 - Support 6 different melody

CP-PAV-C341

4 Door Bell Outdoor Unit



- ▶ Features:
 - 1/4" Smart Sensor
 - 4 Monitor Button (4x3=12 monitors support)
 - One Lock Support
 - Angle of View: 90°

CP-PVM-70T

7" Color Indoor Monitor



- ▶ Features:
 - 7" Colour TFT-LCD Display
 - Feather-Touch Keypad
 - Super Slim hands-free Model
 - Support Additional 3 Indoor Units & 2 Outdoor Units, 1 CCTV In
 - Color/Brightness Settings Adjustments etc
 - Supports Intercom
 - Do not disturb

CP-UNB-CP22M

Apartment Outdoor Station



- ▶ Features:
 - HD CMOS Camera
 - Night vision & Voice indication
 - Video & Audio messaging
 - Local card opening
 - Stainless steel panel, IP54, IK07
 - Surface & Flush mounted

Multi-Apartment Range

CP-UHB-GP02

Guard Station



- Features:
- 10" TFT Capacitive Touch Screen, 1024x600
 - Alarm Intergration
 - Micro SD card optional, max 32GB
 - IPC surveillance
 - Record and snapshot (SD card needed)

CP-UNB-RM701MTH-P

Digital Indoor Monitor




- Features:
- 7" TFT Capacitive touch screen, 1024 x 600
 - Alarm integration
 - IPC surveillance
 - Support standard PoE
 - High performance & Cost-effective
 - Embedded 8GB SD card
 - Color Options: White & Black

CP-UNB-C01-P2

IP Villa Door Station



- Features:
- High definition camera; WDR
 - Operating temperature -30°C–60°C
 - IP65(Silicone sealant is needed. For details, see the quick start guide.)
 - Supports auto IR illumination and D/N
 - Card/app remote/indoor monitor unlock
 - Supports two-way voice call; support calls between door stations and app
 - 10,000 cards
 - Tamper Alarm
 - Support standard PoE power supply
 - Control two locks

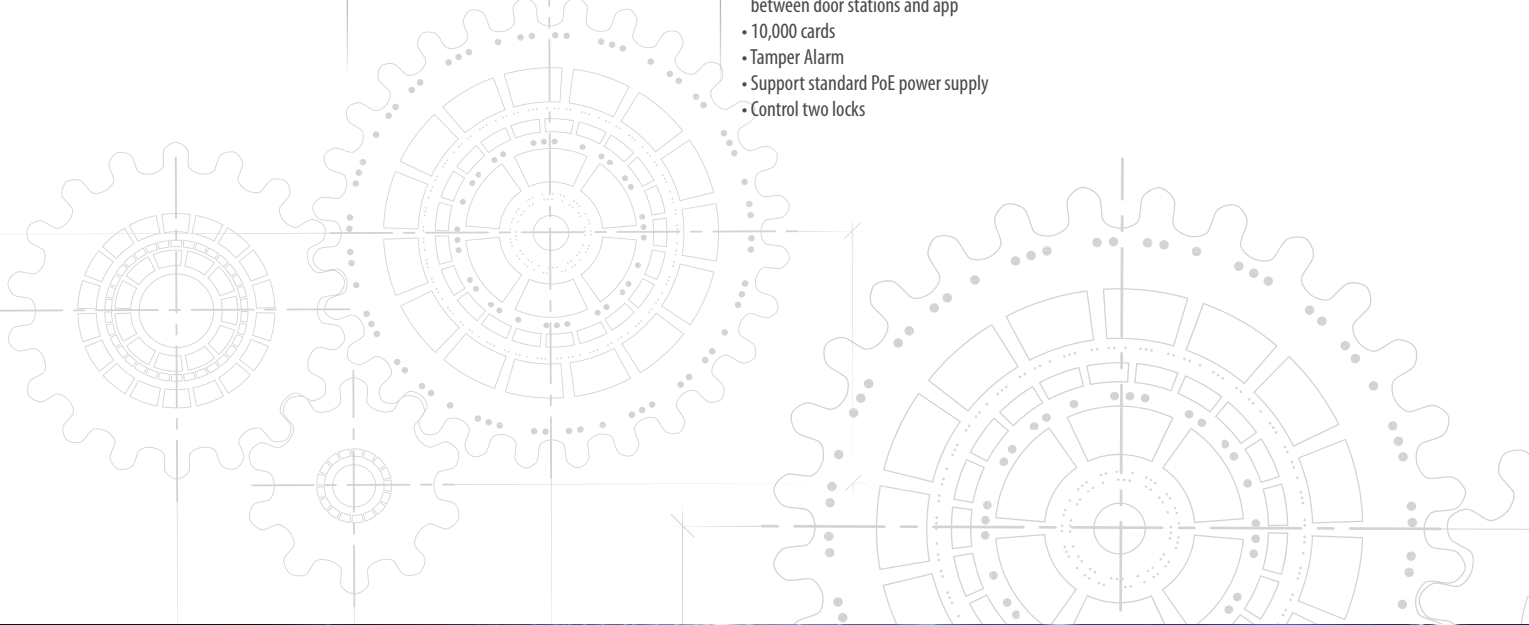

Upto 4K Resolution

ARTIFICIAL INTELLIGENCE

TIME & ATTENDANCE



Time & Attendance

CP-VTA-T2324-U

Fingerprint Time Attendance



- ▶ Features:
 - LCD: 4" 480 x 320 Color Display
 - Hardware Platform: Ws306
 - Fingerprint capturing: Optical Sensor
 - Failed Recognition Rate: $\leq 0.0001\%$
 - False Acceptance Rate: $\leq 0.01\%$
 - Recognition Speed: 1s
 - Recognition ways: 1:1, 1:N
 - Fingerprint capacity: 500

CP-VTA-F1043

Fingerprint Based Time Attendance Terminal




- ▶ Features:
 - 2.8" TFT LCD Display
 - Support 1000 Fingerprints
 - Support 100000 Storage Capacity
 - Support Fingerprint, Password & ID Card

CP-VTA-M1143

Face & Fingerprint Based Time Attendance Terminal



- ▶ Features:
 - 2.8" HVGA Display
 - Support 1000 Face Recognition
 - Support 10000 Fingerprints
 - Support 200000 Storage Capacity
 - Support USB 2.0

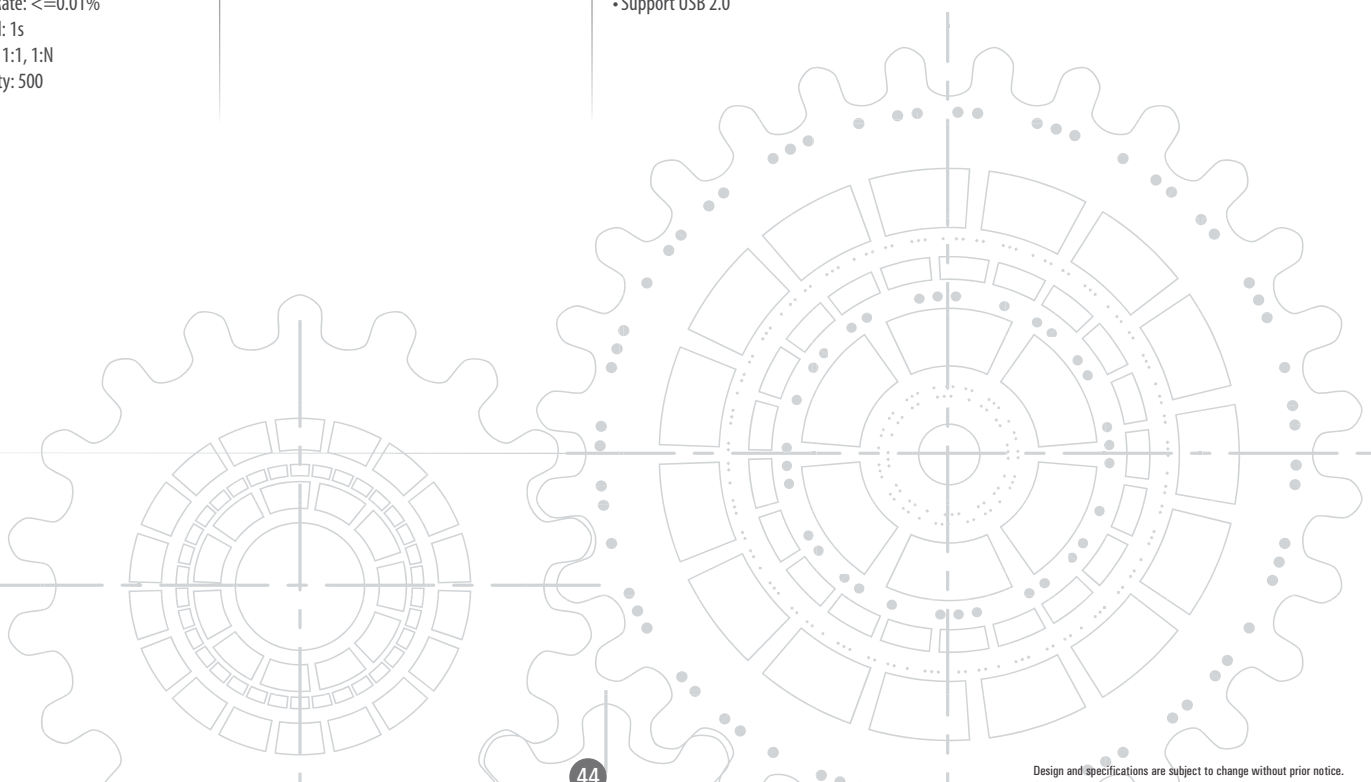

ACCESSORIES



Power Supply

CP-DPS-MD50P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 5A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-MD100P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 10A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-MD200P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 20A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-PD04V2-12D

4 Channel Power Supply



- ▶ Features:
 - 4 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% Full Load Built-in test
 - Plastic Housing

CP-DPS-PD08V2-12D

8 Channel Power Supply



- ▶ Features:
 - 8 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% full Load Built-in test
 - Plastic Housing

CP-DPS-PD16V2-12D

16 Channel Power Supply



- ▶ Features:
 - 16 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% full Load Built-in test
 - Plastic Housing

CP-LPS-PD04-12D

4 Ch. Power Supply



- ▶ Features:
 - EMC/EMI Standards
 - ABS, fire protection
 - Over Current/Voltage Protection; Short Circuit Protection; Over load protection
 - LED indicator for power on

CP-LPS-PD08-12D

8 Ch. Power Supply



- ▶ Features:
 - EMC/EMI Standards
 - ABS, Fire protection
 - Over Current/Voltage Protection; Short Circuit Protection; Over load protection
 - LED indicator for power on

Electric RIM Lock

CP-TA-ER2A-NC

Electric Rim Lock



- ▶ Features:
 - 5Pcs of Iron Computer Keys.
 - Double Brass Cylinders
 - Brass Latch
 - Satin Nickel Finish
 - Adjusted Backset

IR Illuminators

CP-SA-L690-V

IR Illuminator - 60 Meter



- ▶ Features:
 - Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L5601-EW

IR Illuminator - 50 Meter



- ▶ Features:
 - Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L8451-EW

IR Illuminator - 80 Meter



- ▶ Features:
 - To improve performance of the weak light camera, thereby enhancing the picture effects at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - Reduce the network bandwidth requirements

CP-SA-L45160-B

IR Illuminator - 160-100 Meter



- ▶ Features:
 - The function of video analysis at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - To improve performance of the weak light camera and enhancing the picture effects at night

CP-SA-L15120-EW

IR Illuminator - 120 Meter



- ▶ Features:
 - To improve performance of the weak light camera, thereby enhancing the picture effects at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - Reduce the network bandwidth requirements

CP-SA-L630-EW

IR Illuminator - 60 Meter



- ▶ Features:
 - Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L630-E

IR Illuminator - 60 Meter



- ▶ Features:
 - Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

Housing

CP-UA-H14L50B-V

IR Camera Housing



- ▶ Features:
 - Aluminum Casing, IP67, IK10 Housing
 - IR Range of 50Mtr
 - waterproof Coating Flim
 - Easy Installation

CP-UA-H14BV

14" Vandal Proof Camera Housing



- ▶ Features:
 - IP66, Ik10 Housing
 - Heater Blower
 - Waterproof Coating Flim
 - Neat & Integrated design

CP-UA-H14L100B-VP

14" Vandal Proof IR PoE Housing



- ▶ Features:
 - 14" IR PoE Housing
 - IP67, Ik10, Vandalproof
 - Waterproof Coating Flim
 - Neat & Integrated design

CP-UA-H14L100BW

14" Full-function Housing



- ▶ Features:
 - IP66, Housing
 - Waterproof Coating Flim
 - Neat & Integrated design

Bracket

CP-UA-B14

Housing Wall Mount Bracket



CP-UA-B12

Wall Mount Bracket



CP-VA-B11W

Wall Mount Bracket



CP-UA-P3

Pole Mount Bracket



Lens

CP-UA-B2P

Pole Mount Bracket



CP-UA-B21C

In-ceiling Mount Bracket



CP-UML-AD550

4MP CS Mount Lens



CP-UML-AD2712

4MP CS Mount Lens



SD Card

CP-UML-4K-AL1042

12MP 4K CS Mount Lens



CP-UML-AL1575

12MP C mount Lens



CP-NM32/NM64/NM128

Micro SD Card



- ▶ Features:
 - Compatible with micro SDHC & micro SDXC supporting Host devices
 - High Speed Data transfer
 - Speed Grade UHS (U3)
 - Low power consumption
 - Performance 30 MB/s Min Write speed
 - Micro SD Card 32/64/128GB (Optional)
 - Read Speed up to 70MB/s

Cable

CP-ECC-70/90/180RS

3+1 CCTV Cable (Standard Cable)



- ▶ Features:
 - Solid Annealed Bare Copper Conductor
 - LLDPE Insulation Material
 - 70/90/180 Mtr. Standard Cable Length
 - For Video, Power and Audio Communication
 - Shielded Communication cable
 - Excellent signaling characteristics

CP-ECC-70R

3+1 CCTV Cable (Eco Cable)



- ▶ Features:
 - Solid Annealed Bare Copper Conductor
 - High performance 3+1 Cable
 - LLDPE Insulation Material
 - 70 Mtr. Standard Cable Length

CP-ECC-90RM

3+1 CCTV Cable (Premium Cable)



- ▶ Features:
 - Solid Annealed Bare Copper Conductor
 - Heavily Braided with HDPE Insulation
 - 90 Mtr. Standard Cable Length

CP-ECC-90RP

3+1 CCTV Cable (Premium Pro Cable)



- ▶ Features:
 - High performance 3+1 cable
 - Compatible for Analog security products
 - For Video, Power & Coaxial Audio Communication
 - Higher gauge copper core & Higher quality copper braiding
 - 90 Mtr. Standard Cable Length

CP-ECC-91RS

2+1 CCTV Cable (Standard Cable)



- ▶ Features:
 - Solid Annealed Bare Copper Conductor
 - LLDPE Insulation Material
 - 90 Mtr. Standard Cable Length
 - For Video & Power Communication (Audio via Coaxial Protocol)

CP-EST-6TGA-305

CAT6 Armoured Cable



- ▶ Features:
 - Generally conforming to EIA/TIA 568-C.2 and IEC/ISO11801
 - Excellent Margin with suppression of Cross Talk (NEXT)
 - 4 Pair Separator Design
 - 23 AWG cable
 - For Outdoor installation

CP-EST-6TGA-305V1


CAT6 UTP Armoured Lan Cable



- ▶ Features:
 - Solid Bare Electrolytic Grade Copper
 - Conductor Diameter 24 AWG (0.50 +/- 0.015MM)
 - Polyethylene (HDPE) type Insulation
 - AL. ARMoured (0.60MM)
 - Outer Sheath material PVC

CP-EUT-6TGL1-305


Cat6, 4Pair UTP Cable (Tangle Free)



- ▶ Features:
 - Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications
 - Excellent Margin with suppression of Cross Talk (NEXT)
 - 4 Pair Separator Design
 - 24 AWG cable
 - Optionally Available in Low Smoke Zero Halogen and PE jacket and Armoured

CP-EUT-6TGL-305


Cat6, 4Pair 23AWG UTP Cable (Tangle Free)



- ▶ Features:
 - Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications
 - Excellent Margin with suppression of Cross Talk (NEXT)
 - 4 Pair Separator Design
 - 23 AWG cable
 - Optionally Available in Low Smoke Zero Halogen and PE jacket and Armoured

CP-EST-6TGD-305V1

Cat6 Double Jacket Cable




► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- Can be used for Outdoor Installation
- 4 Pair Separator Design
- 24 AWG cable
- Available in Combination of PVC and LDPE Jacket

CP-FUT-6TSRH-305

Cat6, 4 Pair UTP Cable (Eco Series)



► Features:


- Insulation Material HDPE
- Nom. Thickness 0.21mm
- 24 AWG Cable

ECO SERIES Cat6 Cable (24 AWG)

Your Intelligent Choice For Every Surveillance Need



CABLES
by CP PLUS

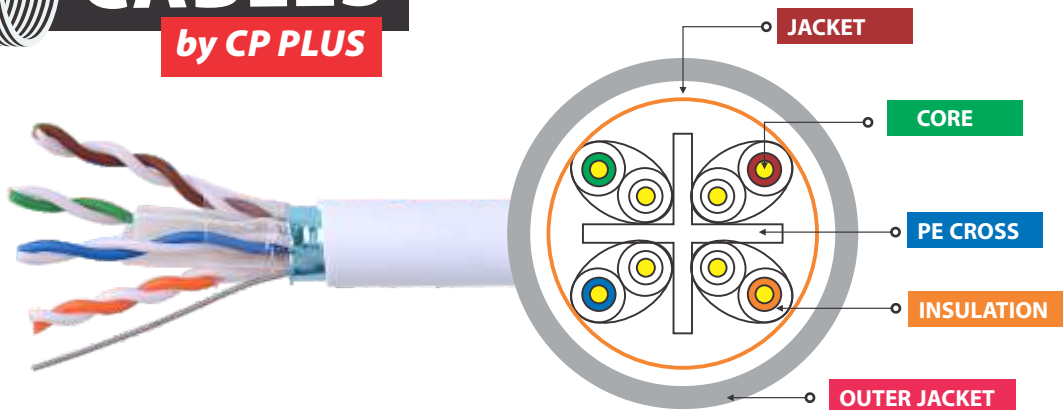

KEY FEATURES

Insulation Material HDPE | Jacket Nom. O.D. 6.0mm | 24 AWG Cable
4 Pair CCA Cable | 305 Mtr. Length | Fresh PVC | 24 AWG

Picture used is for reference only

NETWORK RACK

(DVR/NVR/SWITCHES)



DVR/NVR/Switches Rack

CP-HA-RK5545-6LP

6U DVR/ NVR Network Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 6U.
- Basic frame: CRCA (MS SHEET).
- Construction: Welded.
- Cable Entry/Exit provision at Top & Bottom with Rubber at Edges.
- Front Door: Toughened Glass with Lock & Key.
- Toughened Glass used as an excellent thief deterrent.
- 19" Vertical Mounting RAIL with Clear "U" Marking.
- Powder coated Color RAL- 7035.
- Conforms to DIN41494 or equivalent ISO Standards.
- Standard Accessories Available.
- Others Additional Accessories Optional.
- Load Bearing Capacity - 30Kg.
- Differentiator Quality.
- Industry leading design.

CP-PA-RK5563-9U

9U Rack (With Fan, Cable Manager & PDU)



- ▶ Features:
- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 9U 630mm deep 19".
- 1.6MM Vertical Mounting Rail with clear 'U' Marking
- 0.8MM CRCA Sheet
- Cooling Fan options (min 2).
- Cable entry/exit provision at top and bottom with rubber at edges
- Front with Toughened Glass Door & Lock (5 MM)
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5550-12L

12U Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 12U.
- 19" Vertical Mounting Rail with clear 'U' Marking.
- Basic Frame CRCA MS Sheet.
- Cooling Fan Options (Min 2).
- Cable entry/exit provision at top and bottom with rubber at edges.
- Front with Toughened Glass Door with Lock & Key.
- Powder coated Color- RAL- 7035.
- Wall Mounting Kit.
- Standard Accessories Available.
- Other Additional Accessories Optional.
- Load Bearing Capacity 40Kg.
- Conforms to DIN41494 or equivalent ISO Standards.
- For Small Networking, Telecom, Audio Video, CCTV applications.

CP-HA-RK5550-15L

15U Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 15U 630mm deep 19".
- 1.6mm Vertical Mounting Rail with clear 'U' Marking.
- 0.8mm CRCA Sheet.
- Cooling Fan options (min 2).
- Cable entry/exit provision (minimum 2) at top and bottom with rubber at edges.
- Front with Toughened Glass Door & Lock (5mm).
- Powder coated Color- RAL- 7035.
- Wall Mounting Kit.
- Conforms to DIN41494 or equivalent ISO 9001:2015 and 14001:2015 Standards.
- Load Bearing Capacity - 40Kg.
- For Small Networking, Telecom, Audio video, CCTV applications.
- 1 PDU, 6 Socket, 1 Cooling Fan, 1 Cantilever Tray, 1 Cable Manager, Hardware Kit

Value Series

CP-HA-RK6010-24U

24U Rack



- ▶ Features:
 - Wall Mount Rack 24U 600mm width with glass door, lock & key.
 - 1.6mm Vertical Mounting Rail with clear 'U' Marking.
 - 1.2mm CRCA Sheet.
 - Cooling Fan options (min 2).
 - Cable entry/exit provision (minimum 2) at top and bottom with rubber at edges.
 - Front with Toughened Glass Door & Lock (5mm).
 - Powder coated Color- RAL- 7035.
 - Wall Mounting Kit.
 - Conforms to DIN41494 or equivalent ISO 9001:2015 and 14001:2015 Standards.
 - Load Bearing Capacity - 40Kg.
 - For Small Networking, Telecom, Audio video, CCTV applications.

CP-HA-RK6010-42U

42U Network Rack (Premium Series)



- ▶ Features:
 - Floor Standing Rack 42U 1000mm deep, 600mm width.
 - Main Frame Pillar with 125mm width & removable side panels.
 - Basic frame: CRCA (MS) Sheet.
 - L-Shape adjustable Vertical Mounting Rail 2mm with 'U' Marking.
 - Castor wheels 6 inch with front brake.
 - Two line cable entry/exit provision (minimum 5) at top/ bottom with rubber.
 - Front with Toughened Glass Door & Lock (5mm).
 - Rear MS vented or perforated door.
 - Cooling Fan options (min 2/4).
 - 1U Horizontal Cable Manager – 2 Nos.
 - PDU (5 Socket Round 5/15Amp 230V AC) - 2 Nos.
 - Cooling Fan (230V AC, 90 CFM) - 4 Nos.
 - Conforms to DIN41494 or equivalent ISO Standards.

CP-HA-RK3535VM-2U

2U DVR/ NVR Rack- Modular (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.5mm thick.
 - Modular Series: Foldable type, easy to build
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Industry leading design.

CP-HA-RK4535VM-2U

2U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 450mmx350mmx140mm

CP-HA-RK4535VW-2U

2U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction– Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - PDU 3 Sockets (5amp), Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 10kg.
 - Industry leading design.

CP-HA-RK5535VM-4U

4U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 550x350x240mm

CP-HA-RK4535VM-4U

4U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Width 450mm x Depth 350mm

CP-HA-RK5035VW-3U

3U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction - Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - 3 Socket PDU (5amp), Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Industry leading design.
 - Load Bearing Capacity - 15kg

CP-HA-RK5535VW-4U

4U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction– Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable–Toughened glass with Lock & Key.
 - Toughened Glass used as an excellent thief deterrent.
 - PDU 3 Sockets (5amp), 1U cantilever tray, 1 Fan Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 15kg.
 - Industry leading design.

CP-HA-RK5535VW-4U1P

4U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction– Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable–Toughened glass with Lock & Key.
 - Toughened Glass used as an excellent thief deterrent.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 15kg.
 - Industry leading design.

CP-HA-RK5535VW-4U1P

4U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction– Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable–Toughened glass with Lock & Key.
 - Toughened Glass used as an excellent thief deterrent.
 - PDU 3 Sockets (5amp).
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 15kg.
 - Industry leading design.



INDUSTRY SECURITY SOLUTION



ANPR Solution
Entrance & Exit



Smart Analytics
Production Line



Body Worn
Patrolling Team



Fisheye 360°
Warehouse



Thermal & Explosion Proof
Hazardous Area



PTZ, Long Range
Smart Tracking
Perimeter



4K Resolution Camera
Parking Area

Manufacturing facilities and warehouses are stocked up with raw materials, WIP or finished goods at all times and therefore require round the clock monitoring and protection. CP PLUS offers solutions designed especially for industrial setups that cater to all their security needs.

Powered by
**ARTIFICIAL
INTELLIGENCE**



- **Industry-grade Design** Solution...
- Explosion-proof
 - Anti-corrosion
 - IP68
 - Surge protection



- **Vandalism Detection /Prevention** Solution...
- Intelligent video analysis
 - ANPR Solution
 - Access control
 - FR solution



- **Alarm integration** Solution...
- Temperature measurement
 - Fire Detection
 - Beam Sensor



- **Detection of Equipment Failure** Solution...
- Thermal cameras
 - Leakage in chemical containers
 - Oil & Gas leakage
 - Energy audits
 - Electrical drops, panels, breakers, switches and wire connections



- **Integrated Software Platform** Solution...
- Integration platform for different solution
 - Server client architecture
 - N+M fail over
 - Evidence management
 - Audit trail live

