

Range of HD & IP Cameras & Recorders High - Definition Redefined

You & CP PLUS : A Relationship Built on
INTELLIGENCE, SECURITY & TRUST



HD Cameras & Recorders Series

1 MP - Series

CP-VAC-D10L2-V2

1 MP HD IR Dome Camera - 20 Mtr.



► Features:

- 1 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@720P
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- Day/Night(ICR), AWB, AGC, BLC
- IR Range of 20 Mtr.

CP-VAC-T10PL2-V2

1 MP HD IR Bullet Camera - 20 Mtr.



► Features:

- 1 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@720P
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- Day/Night(ICR), AWB, AGC, BLC
- IR Range of 20 Mtr.

2.4 MP - Series

CP-VAC-D24L2-V3

2.4 MP Full HD Eco-Lite IR Dome Camera - 20 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 2DNR, AWB, AGC, BLC
- IR Range of 20 Mtr.

CP-VAC-D24ML3-V3

2.4 MP Full HD Eco-Lite IR Bullet Camera - 30 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- 25/30fps@2.4MP
- 3.6mm Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- IR Range of 30 Mtr., IP66

CP-VAC-T24PL2-V3

2.4 MP Full HD Eco-Lite IR Bullet Camera - 20 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- IR Range of 20 Mtr. IP66

CP-VAC-T24L3-V3

2.4 MP Full HD Eco-Lite IR Bullet Camera - 30 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 6mm Lens (3.6mm Optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- IR Range of 30 Mtr., IP66

CP-VAC-V24FL4-V3

2.4 MP Full HD Eco-Lite Vandal Dome Camera - 40 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- 25/30fps@2.4MP
- 2.8-12mm Varifocal Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- IR Range of 40 Mtr., IP66

CP-VAC-T24FL5-V3

2.4 MP Full HD Eco-Lite IR Bullet Camera - 50 Mtr.



► Features:

- 1/2.7" 2.4 MP HQIS Pro Image Sensor
- Plug-n-Play HD/SD Camera
- 25/30fps@2.4MP
- 2.8-12mm Varifocal Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- IR Range of 50 Mtr., IP66

CP-VAC-D24L2-V5

2.4 MP Full HD IR Dome Camera - 20 Mtr.



► Features:

- 1/2.7" 2.4MP HD Color Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- IR Range of 20 Mtr.

CP-VAC-T24PL2-V5

2.4 MP Full HD IR Bullet Camera - 20 Mtr.



► Features:

- 1/2.7" 2.4MP HD Color Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- IR Range of 20 Mtr., IP66

CP-VAC-T24R5-V5

2.4 MP Full HD Array Bullet Camera - 50 Mtr.



► Features:

- 1/2.7" 2.4 MP HD Color Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 6mm Lens (8mm Optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- Array Range of 50 Mtr., IP66

CP-VAC-T24R8-V5

2.4MP Full HD Array Bullet Camera - 80 Mtr.



► Features:

- 1/2.7" 2.4 MP HD Color Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 8mm Lens (12mm Optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- Array Range of 80 Mtr., IP66

2.4 MP - Series

CP-USC-DA24L2

2.4MP IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), AWB, AGC, BLC
 - Max. IR LEDs length 20 Mtr.

CP-USC-DA24L3

2.4MP IR Dome Camera - 30 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR),2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 30m, IP67

CP-USC-TA24L2

2.4MP IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 20 Mtr., IP67

CP-USC-TA24L3M

2.4 MP IR Bullet Camera - 30 Mtr.



- Features:
- 2.4 MP CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 30 Mtr., IP67

CP-USC-DA24R5C

2.4MP Array Dome Camera - 50 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2DNR,AWB, AGC, BLC
 - Max. Array LEDs length 50m, Built-in Mic, IP67

CP-USC-TA24L8C

2.4MP IR Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP(1928×1088)
 - 3.6mm fixed lens (2.8mm, 6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - Max. IR LEDs length 80m, Built-in Mic, IP67

CP-USC-VA24FR3

2.4 MP Array Vandal Dome Camera - 30 Mtr.



- Features:
- 2.4MP CMOS Image Sensor
 - HD & SD Switchable, OSD menu over Coaxial cable
 - Max 25/30fps@2.4MP(1928×1088)
 - 2.7mm-13.5mm Varifocal lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Max. Array LEDs length 30m, IP67, IK10

CP-USC-TA24ZL6

2.4MP Full HD IR Bullet Camera - 60 Mtr.



- Features:
- 1/2.7" 2.4MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 25/30fps@2.4MP
 - 2.7-12mm motorized lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - Max. IR LEDs length 60m, IP67

2 MP - Guard+ Series

CP-GPC-DA20L2-ME

2MP Full HD IR Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 30fps@1080P
 - 2.8mm Lens (3.6mm optional)
 - 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

CP-GPC-TA20L2-ME

2MP Guard+ Active Deterrence Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 30fps@1080P
 - 2.8mm Lens (3.6mm optional)
 - 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

CP-GPC-TA20L2S-ME

2MP Guard+ Active Deterrence Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - HD and SD output switchable
 - Max 30fps@1080P
 - 2.8mm Lens
 - Built-in PIR, 10m/110°detecting range/angle
 - DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
 - IR Range of 20 Mtrs, IP67

2.4 MP - Guard+ Series

CP-GPC-D24L2-S

2.4MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 20 Mtr., IP66

CP-GPC-T24PL2-S

2.4MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 20 Mtr., IP66

CP-GPC-D24L3-V5

2.4MP Full HD IR Guard+ Dome Camera - 30 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 30 Mtr., IP66

CP-GPC-T24L4-V5

2.4MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 40 Mtr., IP66

CP-GPC-T24L8-V5

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 8mm lens (6mm, 3.6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

5 MP - Guard+ Series

CP-GPC-T24FL8-V5

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 2.8-12mm Varifocal Lens
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC- D50L2-S

5MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 25/30fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Support Starlight Function
 - Max. IR Range of 20 Mtr., IP66

CP-GPC-T50PL2-S

5MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 25/30fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Support Starlight Function
 - Max. IR Range of 20 Mtr., IP66

CP-GPC-D50L3-V5

5MP Full HD IR Guard+ Dome Camera - 30 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 30 Mtr., IP66

5 MP - Series

CP-GPC-T50L4-V5

5MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 40 Mtr., IP66

CP-GPC-T50L8-V5

5MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 8mm lens (6mm, 3.6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-GPC-T50FL8-V5

5MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
 - Max 20fps@5MP
 - 2.8-12mm Varifocal Lens
 - Support low illumination, warm light day night full color
 - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
 - Max. IR Range of 80 Mtr., IP66

CP-VAC-D50L2-V2

5 MP Full HD IR Dome Camera - 20 Mtr.



- Features:
- 5 MP HQIS Pro Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 3.6mm Lens (6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 20 Mtr.

CP-VAC-D50ML3-V2

5MP Full HD IR Dome Camera - 30 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 3.6mm Lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtr., IP66

CP-VAC-T50PL2-V2

5MP Full HD IR Bullet Camera - 20 Mtr.



- Features:
- 5 MP HQIS Pro Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 3.6mm Lens (6mm optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - IR Range of 20 Mtr., IP66

CP-VAC-T50L3-V2

5 MP Full HD IR Bullet Camera - 30 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 6mm Lens (3.6mm Optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
 - IR Range of 30 Mtr., IP66

CP-VAC-T50R5-V2

5 MP Full HD Array Bullet Camera - 50 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 8mm Lens (6mm Optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtr., IP66

Fisheye Camera

CP-VAC-T50R8-V2

5 MP Full HD Array Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 12mm Lens (8mm Optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 80 Mtr., IP66

CP-VAC-V50FL4-V2

5MP Full HD VF IR Vandal Dome Camera - 40 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 2.8-12mm Varifocal Lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtr., IP66

CP-VAC-T50FL5-V2

5MP Full HD VF IR Bullet Camera - 50 Mtr.



- Features:
- 1/2.7" 5MP HD Color Image sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@5MP
 - 2.8-12mm Varifocal Lens
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtr., IP66

CP-UVC-EB50L1C-D

5MP WDR IR HDCVI Fisheye Camera - 10 Mtr.



- Features:
- 1/2.8" 5 MP CMOS Image sensor
 - Panoramic Fisheye Lens
 - Max 20fps@5MP
 - 1.4mm Lens
 - Support Built-in Mic
 - WDR(120dB), Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC, HLC
 - Max. IR LEDs length 10m

Digital Video Recorder - Orange Series

CP-UVR-0401/801E1-CS

4/8 Ch. 1080P Lite DVR



- Features:
- 4/8 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 2/5MP IP Camera
 - 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801/1601E1-HC

4/8/16 Ch. 1080P Lite H.265 DVR



- Features:
- 4/8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 2/6MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0801K1-H

8 Ch. 1080P H.265 DVR



- Features:
- 8 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 1 SATA port up to 10TB, 2 USB Ports, 1 RJ45, 1RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601K1B-H

16 Ch. 1080P H.265 HD DVR



- Features:
- 16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - Max 96Mbps Incoming Bandwidth
 - H.265+/H.265 dual-stream video compression
 - Support 1 SATA HDD up to 10TB, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0801/1601F1-HC

8/16 Ch. 1080P Lite H.265 DVR



- Features:
- 8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 1 SATA HDD up to 6TB, 2 USB Ports
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801L1-4KH

4/8 Ch. 4K H.265 DVR



- Features:
- 4/8 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 1 SATA HDD up to 10TB, 2 USB Ports, 1RJ45, 1Rs485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601L1B-4KH

16 Ch. 4K H.265 DVR



- Features:
- 16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 1 SATA HDD up to 10TB, 2 USB Ports, 1RJ45, 1Rs485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3201E2-H

32 Ch. 1080P Lite H.265 DVR



- Features:
- 32 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - Max 64Mbps Incoming Bandwidth
 - H.265 dual-stream video compression
 - Support 2 SATA HDD up to 10TB Each, 2 USB Ports
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Digital Video Recorder - Indigo Series

CP-UVR-3201K2-H

32 Ch. 1080P H.265 DVR



- Features:
- 32 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - H.265+/H.265 dual-stream video compression
 - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-VRA-1K0401

4 Ch. 1080P Indigo DVR



- Features:
- 4 Ch. Video, 1 Ch. Audio
 - Support AHD, TVI, CVI, CVBS, IP Video input
 - Support 1 SATA HDD up to 8TB, 2 USB Ports2.0
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-1K0401-H

4 Ch. 1080 H.265 Indigo DVR



- Features:
- 4 Ch. Video, 1 Ch. Audio
 - H.265/H.264 video compression
 - Support 1 SATA HDD up to 8TB Each, 2 USB Ports
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-1E0801

8 Ch. 1080N Indigo DVR



- Features:
- 8 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support 1 SATA HDD up to 8TB, 3 USB Ports2.0
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-1E0801-H

8 Ch. 1080P H.265 Indigo DVR



- Features:
- 8 Ch. Video, 1 Ch. Audio
 - H.265/H.264 video compression
 - Support AHD, TVI, CVI, CVBS, IP Video input
 - Support 1 SATA HDD up to 8TB, 2 USB Ports 2.0
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-1E1602-H

16 Ch. H.265 Indigo DVR



- Features:
- 16 Ch. Video, 2 Ch. Audio
 - Support AHD, TVI, CVI, CVBS, IP Video input
 - Support 1 SATA Port up to 8TB, 2 USB Ports(2.0)
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-2K3216-H

32 Ch. 1080N H.265 Indigo DVR



- Features:
- 32 Ch. Video, 1 Ch. Audio
 - H.265/H.264 video compression
 - Support AHD, TVI, CVI, CVBS, IP Video input
 - Support 2 SATA HDD up to 8TB Each, 2 USB2.0
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

CP-VRA-2F3216

32 Ch. H.265 Indigo DVR



- Features:
- 32 Ch. Video, 16 Ch. Audio
 - Support AHD, TVI, CVI, CVBS, IP Video input
 - Support 2 SATA HDD up to 8TB Each, 2 USB2.0
 - HDMI / VGA simultaneous video output
 - Mobile Software: cMOB-20, CMS Software: CVMS-2000

IP Cameras & Recorders Series

2 MP H.265+ Series

CP-UNC-DS21PL3

2 MP Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 20fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS21PL3

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 20fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DS21ML3

2 MP Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP PS CMOS Image Sensor
 - Max. 20fps@1080P
 - H.265+/H.265 dual-stream encoding
 - 2.8 mm fixed lens (3.6 mm optional)
 - DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS21ML3

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP PS CMOS Image Sensor
 - Max. 20fps@1080P
 - H.265+/H.265 dual-stream encoding
 - 2.8 mm fixed lens (3.6 mm optional)
 - DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DS25PL3

2 MP H.26 Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DS25ML3

2 MP Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS25PL3

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS25ML3

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DS25ZPL3-M

2 MP Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8~12mm Motorized lens
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS25ZML4-M

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8~12mm Motorized lens
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L5/L8

2 MP Full HD IR Network Bullet Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 25/30fps@2MP
 - 3.6mm fixed lens (6mm, 8mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AGC, HLC, BLC
 - IR Range of 50/80 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21L3-MS

2MP Full HD IR Bullet Camera - 30Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - Max. 25/30fps@2MP (1920x1080)
 - H.265 coding
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - Support Starlight Function
 - IR Range of 30 Mtrs, IP67, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB21L3-MS

2MP Full HD IR Vandal Dome Camera - 30Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - Max. 25/30fps@2MP (1920x1080)
 - H.265 coding
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - Support Starlight Function
 - IR Range of 30 Mtrs, IP67, IK10, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DB21L3C-M

2 MP Full HD IR Network Dome Camera



- Features:
- 1/2.7" 2MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm, 3.6mm Lens
 - DWDR, 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., Micro SD Card, Built-in Mic, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP H.265+ Series

CP-UNC-DS41PL3

4 MP Full HD IR Network Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VS41ML3

4MP Full HD IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. 20fps@4MP, 25/30fps@3MP
 - H.265+/H.265 dual-stream encoding
 - 2.8 mm fixed lens (3.6 mm optional)
 - DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS41PL3

4 MP Full HD IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265+ & H.265 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DS41ZPL3-M

4 MP Full HD IR Network Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265+ & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8~12mm Motorized lens
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TS41ZML4-M

4 MP Full HD IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265+ & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8~12mm Motorized lens
 - DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP WDR Series

CP-UNC-DA41L3S-D

4 MP Full HD WDR IR Network Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VA41L3-D

4 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, IK10, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VA41L3-MD

4 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8 mm fixed lens (3.6 mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, IK10, PoE, SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41L3-D

4 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41L3-MDS

4 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 Stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm Optional)
 - WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., Micro SD Card, IP67, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41L3-MDS

4 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm Optional)
 - WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., Micro SD Card, IP67, IK10, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DB41L3C-MD

4 MP Full HD WDR IR Network Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - H.265 & H.264 stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm Optional)
 - WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., Micro SD Card, IP67, Built-in Mic, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP WDR Starlight Series

CP-UNC-DA51L3-DS

5 MP Full HD WDR IR Network Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, Starlight, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VA51L3-MDS

5 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA51L3-DS

5 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, Starlight, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

8 MP WDR Starlight Series

CP-UNC-TA81L5-DS

8 MP Full HD WDR IR Network Bullet Camera




- Features:
- 1/2" 8MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 25/30fps@8MP
 - 2.8mm fixed lens (4mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, IP67, Starlight, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VA81L3-MDS

8 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/2" 8MP CMOS Image Sensor
 - H.265 & H.264 dual-stream encoding
 - Max. 25/30fps@8MP
 - 4.0mm fixed lens (6mm optional)
 - WDR(120dB), Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

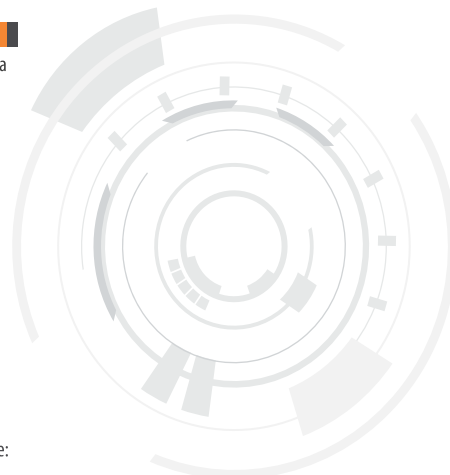

2 MP PTZ Series

CP-UNP-D2521L10-DP

2 MP 25x IR Network PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - H.265+/H.264+ / MJPEG Triple-stream encoding
 - Max. 25/30fps@2MP
 - 4.8mm~120mm Lens, 25x Optical Zoom
 - WDR(120dB), 3D DNR, Day/Night(ICR), ROI, Defog, AWB, AGC, BLC, HLC
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 100 Mtr., IP66, PoE+
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E2521L15-DAP

2 MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 50/60fps@2MP
 - 4.8mm~120mm Lens (25x Zoom)
 - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
 - H.265/H.264 / MJPEG dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 150 Mtr., IP66, PoE+, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F2521L20-DAP

2 MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
 - Max. 50/60fps@1080P
 - 4.8mm~120mm Lens (25x Zoom)
 - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
 - H.265/H.264 / MJPEG dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP PTZ Series

CP-UNP-F3021L20-DAP

2 MP 30x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
 - Max. 50/60fps@1080P
 - 4.5mm~135mm Lens (30x Zoom)
 - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
 - H.265+/H.265/H.264+/H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP PTZ Series

CP-UNP-3041L10DA-P

4MP 30x WDR Network IR PTZ Camera



- Features:
- 1/3" 4MP CMOS Image sensor
 - Max. 25/30fps@4MP
 - 4.5mm ~ 135.0mm Lens, (30x Zoom)
 - WDR (120dB), Day/Night(ICR), 3D DNR, Auto iris, Auto focus, AWB, AGC, BLC, HLC
 - H.265/H.264 / MJPEG dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 100 Mtr., IP66, PoE+, SD Card, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-3041L10DA

4MP 30x WDR Network IR PTZ Camera



- Features:
- 1/3" 4MP CMOS Image sensor
 - Max. 25/30fps@4MP
 - 4.5mm ~ 135.0mm Lens, (30x Zoom)
 - WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
 - H.265/H.264 / MJPEG dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 100 Mtr., IP66, SD Card, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Highend PTZ Series

CP-UNP-F4521L25-DAP

2MP 45x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 50/60fps@2MP
 - 3.95mm~177.7mm Lens (45x Zoom)
 - WDR(120dB), Day/Night(ICR), 2D/3D-DNR, Defog, ROI, EIS, AGC, BLC, HLC
 - H.265+/H.265/H.264+/H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 250 Mtr., IP67, IK10, SD Card, Auto Tracking, PoE+
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



Network Video Recorder

CP-UNR-C1041/C1081-H

4/8 Ch. H.265 Network Video Recorder



- Features:
- 4/8 Channel IP Camera Input
 - H.265+/H.264+ dual codec decoding
 - Max 40/20Mbps incoming/outgoing bandwidth
 - Support up to 6MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 1 SATA HDDs up to 4TB, 2 USB(2.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2041-4K2081-4K2161-V2

4/8/16 Ch. 4K H.265 Network Video Recorder



- Features:
- 4/8/16 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 1 SATA HDDs up to 6TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2042-4K2082-4K2162-V2

4/8/16 Ch. 4K H.265 Network Video Recorder



- Features:
- 4/8/16 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082/4K4162/4K4322-V2

8/16/32 Ch. H.265 4K Network Video Recorder



- Features:
- 8/16/32 Channel IP Camera Input
 - H.265/H.264 dual codec decoding
 - Max 200Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB, 2 USB(1 USB3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4164/4K4324-V2

16/32 Ch. H.265 4K Network Video Recorder



- Features:
- 16/32 Channel IP Camera Input
 - H.265/H.264 dual codec decoding
 - Max 200Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 4 SATA HDDs up to 24TB, 2 USB(1 USB3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



Time & Attendance

CP-VTA-T2324-U

Fingerprint Time Attendance



- Features:
- LCD: 4" 480 x 320 Color Display
 - Hardware Platform: WS306
 - Fingerprint capturing: Optical Sensor
 - Failed Recognition Rate: <=0.0001%
 - False Acceptance Rate: <=0.01%
 - Management Record Capacity: 1000, Storage Capacity: 100000
 - Fingerprint capacity: 500
 - Direct Report download in excel

CP-VTA-F1043

Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" TFT LCD Display
 - Support 1000 Fingerprints
 - Support 100000 Storage Capacity
 - Support Fingerprint, Password & ID Card
 - Support Battery Back up

CP-VTA-M3343

Face & Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" HVGA Display
 - Support 300 Face Recognition
 - Support 3000 Fingerprints
 - Support 200000 Storage Capacity
 - Support USB 2.0
 - Support USB 2.0 & TCP/IP
 - Support Access Control, Proximity Cards & locks

CP-VTA-M1143

Face & Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" HVGA Display
 - Support 1000 Face Recognition
 - Support 10000 Fingerprints
 - Support 200000 Storage Capacity
 - Support USB 2.0
 - Support Battery Back-up
 - Support USB 2.0 & TCP/IP
 - Support Access Control, Proximity Cards & locks

VDP

CP-PVK-70TH

7" Colour TFT-LCD Display




- Features:
- 4 Wire System, Easy Installation
 - Feather-touch Keypad
 - Super Slim hands-free Model
 - Electric door lock release
 - High Resolution Colour Camera 700TVL, With IR LED for Night Vision
 - Rain Cover & Mount Angle Available
 - Support Additional 3 Indoor Units & 2 Outdoor Units, 1CCTV in
 - Color Settings Adjustments
 - Supports Intercom
 - Do not disturb
 - Dimension 124mm * 40mm * 25mm

CP-PVK-70MTH1

7" Color Video Door Phone Kit with Memory



- Features:
- 7" Colour TFT-LCD Display
 - Feather-touch Keypad
 - Super Slim hands-free Model with Memory (100 Snapshots)
 - Electric door lock release
 - High Resolution Colour Camera 700TVL, with IR LED for Night Vision
 - Rain Cover & Mount Angle available
 - Support Additional 3 Indoor Units & 2 Outdoor Units, 2CCTV In
 - 1CCTV Out for Recording
 - Support Intercom
 - Supports 6 different melody
 - Do not disturb
 - Dimension 124mm * 40mm * 25mm

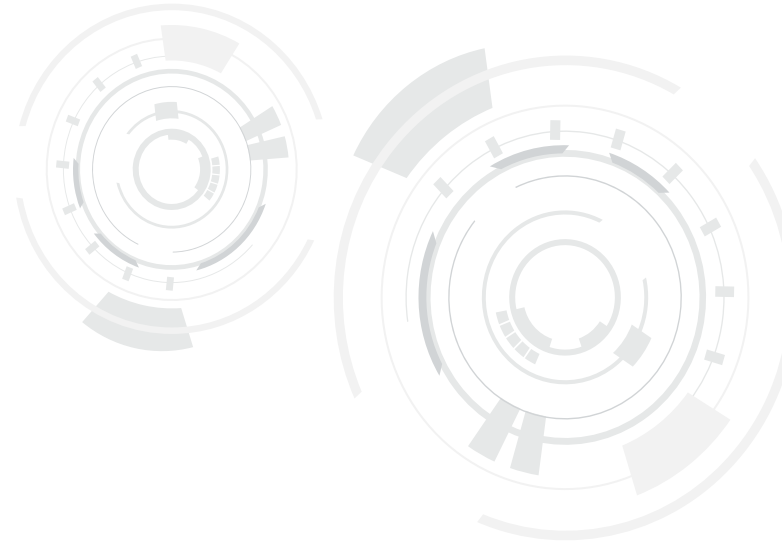

PoE Ethernet Switches

CP-DNW-HP4H2-6-V2

10/100 4 Port PoE+ with 2 10/100 Mbps Uplink Port



- Features:
- 4 x 10/100 Mbps PoE+ Ports
 - 2 10/100 Uplink Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend mode : transmission distance upto 250m
 - Power Budget 60 watt

CP-DNW-HP8H2-10-V2

10/100 8 Port PoE+ with 2 10/100 Mbps Uplink Port



- Features:
- 8 x 10/100 Mbps PoE+ Ports
 - 2 10/100 Uplink Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend mode : transmission distance upto 250m
 - Power Budget 100 watt

CP-DNW-HP8G2-10-V2

10/100 8 Port PoE+ with 2 10/100/1000 Mbps Uplink Port



- Features:
- 8 x 10/100 Mbps PoE+ Ports
 - 2 10/100/1000 Mbps Uplink Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend mode : transmission distance upto 250m
 - Power Budget 100 watt

CP-ANW-HPU8G2-96

10/100 8 Port with 2 Giga Uplink, PoE Switch, 96W



- Features:
- 8 x 10/100 Mbps PoE Ports
 - 2 Gigabit RJ45 Uplink Port
 - Support Four Working Mode; AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 96 watt

CP-ANW-HP4H2-6

10/100 4 Port PoE+ with 2 10/100 Mbps Uplink



- Features:
- 4 x 10/100 Mbps PoE+ Ports
 - 2 10/100 Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 60 watt

CP-ANW-HP8H2-96

10/100 8 Port PoE+ with 2 10/100 Mbps Uplink



- Features:
- 8 x 10/100 Mbps PoE+ Ports
 - 2 10/100 Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 96 watt

CP-DNW-HP16G2-20-V2

10/100 16 Port PoE+ with 2 10/100/1000 Mbps Uplink Port



- Features:
- 16 x 10/100 Mbps PoE+ Ports
 - 2 10/100/1000 Mbps Uplink Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend mode : transmission distance upto 250m
 - Power Budget 200 watt

CP-ANW-HP16G2F1-15

10/100 16 Port with 2Giga & 1 SFP Uplink Ports, PoE+ switch 150W



- Features:
- 16x 10/100 Mbps PoE+ Ports
 - 2 Giga and 1 Giga SFP (1 Combo) Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 150 watt

PoE Ethernet Switches

CP-ANW-HP16G2F2-15

10/100 16 Port with 2Giga & 2 SFP Combo Uplink Ports, PoE+ switch 150W



- Features:
- 16x 10/100 Mbps PoE+ Ports
 - 2 Giga and 2 Giga SFP (Combo) Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 150 watt

CP-ANW-HP24G2F1-25

10/100 24 Port with 2Giga & 1 SFP Uplink Ports, PoE+ switch 250W



- Features:
- 24x 10/100 Mbps PoE+ Ports
 - 2 Giga and 1 Giga SFP (1 Combo) Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 250 watt

CP-ANW-HP24G2F2-25

10/100 24 Port with 2Giga & 2 SFP Combo Uplink Ports, PoE+ switch 250W



- Features:
- 24 x 10/100 Mbps PoE+ Ports
 - 2 Giga and 2 Giga SFP (Combo) Uplink Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 250 watt

CP-ANW-GPU8G2-96

10/100/1000 8 Port with 2 Giga uplink, PoE switch, 96W



- Features:
- 8 x 10/100/1000Mbps PoE Ports
 - 2 Gigabit Uplink Ports
 - Support Four Working Mode; AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 96 watt

CP-TNW-GP8G1F1-12

10/100/1000 8 Port with 1 Giga & 1 Giga SFP uplink, PoE switch, 120W



- Features:
- 8 x 10/100/1000Mbps PoE Ports
 - 1 Gigabit & 1 Giga SFP Uplink Ports
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend Mode : 8 port supports 250M meters distance Power Supply
 - Power Budget 120 watt

CP-TNW-GP8F2-12

10/100/1000 8 Port with 2 Giga SFP uplink, PoE switch, 120W



- Features:
- 8 x 10/100/1000Mbps PoE Ports
 - 2 Giga SFP Uplink Ports
 - Support IEEE802.3af/at, Max 30W output per port
 - Extend Mode : 8 port supports 250M meters distance Power Supply
 - Power Budget 120 watt

CP-ANW-GPU16G2F2-15

10/100/1000 16 Port with 2 Giga SFP uplink, PoE switch, 150W



- Features:
- 16 x 10/100/1000Mbps PoE Ports
 - 2 Gigabit SFP Uplink Port
 - Support Four Working Mode; AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 150 watt

CP-ANW-GPU24G2F2-25

10/100/1000 24 Port with 2 Giga SFP Uplink, PoE switch, 250W



- Features:
- 24x 10/100/1000Mbps PoE Ports
 - 2 Gigabit SFP Uplink Port
 - Support Four Working Mode; AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Power Budget 250 watt

CP-ANW-GPM8F2-96

10/100/1000 8 Port with 2 Giga SFP uplink, L2 Managed PoE switch, 96W



- Features:
- 8x 10/100/1000Mbps PoE Port
 - 2 Gigabit SFP Uplink Port
 - Support Four Working Mode; AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Network Management Functions : VLAN, QOS, PoE Management, link aggregation, spanning Tree
 - Web Interface & Telnet CLI for Management
 - Power Budget 96 watt

CP-ANW-GPM24G2F2-25

10/100/1000 24 Port Managed PoE+ Switch with 2 Giga & 2 Giga SFP uplink, 250W



- Features:
- 24x 10/100/1000 Mbps PoE+ Ports
 - 2Gigabit & 2 Gigabit SFP Uplink Ports & One Console Port
 - Support 4 Working Modes: AI VLAN, AI Extend, AI PoE, AI QOS
 - Support IEEE802.3af/at, Max 30W output per port
 - AI Extend: 1-8 port supports 250M meters distance Power Supply
 - Support VLAN, QOS, PoE management, aggregation, spanning tree, multicast
 - Power Budget 250 watt

CP-ANW-GS8

10/100/1000 8 Port Gigabit Network Switch



- Features:
- 8 x 10/100/1000, RJ45 Ports
 - All Ports Support Wire Speed forwarding capacity
 - Support Auto MDI / MDIX
 - Support MAC address self-learning, support full duplex
 - Plug and play, no management required

CP-ANW-GS16

10/100/1000 16 Port Gigabit Network Switch



- Features:
- 16 x 10/100/1000, RJ45 Ports
 - All Ports Support Wire Speed forwarding capacity
 - Support Auto MDI / MDIX
 - Support MAC address self-learning, support full duplex
 - Plug and play, no management required

CP-ANW-GS24

10/100/1000 24 Port Gigabit Network Switch



- Features:
- 24 x 10/100/1000, RJ45 Ports
 - All Ports Support Wire Speed forwarding capacity
 - Support Auto MDI / MDIX
 - Support MAC address self-learning, support full duplex
 - Plug and play, no management required

CP-ANW-GSM24F4-L3

24Port Gigabit Managed L3 Network Switch



- Features:
- 24x 10/100/1000 Mbps Ports
 - 4 Gigabit SFP Uplink Ports & One Console Port
 - Support DHCP Server, DHCP Relay, DHCP Snooping
 - Support VLAN, QOS, ACL, aggregation, spanning tree, multicast
 - Support IPV4 / IPV6
 - Support Web , CLI, SNMP (v1/v2/V3)

CP-ANW-GPI4F2-46

10/100/1000 4 Port with 2 Giga SFP Uplink, Industrial POE Switch



- Features:
- 4Port 10/100/1000 Mbps PoE Port
 - 2 gigabit SFP UPLINK Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Network management functions :VLAN, QoS, SNMPv1/v2c/v3, IEEE802.1X, port mirroring, port aggregation, RMON
 - Support dual DC power backup, built-in over current protection
 - IP40 grade protection, corrugated high strength metal housing
 - Web Interface & console port for management
 - Power Budget : 60 Watt

CP-ANW-GPI8F4-46

10/100/1000 8 Port with 4 Giga SFP Uplink, Industrial POE Switch



- Features:
- 8Port 10/100/1000 Mbps PoE Port
 - 4 gigabit SFP UPLINK Port
 - Support IEEE802.3af/at, Max 30W output per port
 - Network management functions :VLAN, QoS, SNMPv1/v2c/v3, IEEE802.1X, port mirroring, port aggregation, RMON
 - Support dual DC power backup, built-in over current protection
 - IP40 grade protection, corrugated high strength metal housing
 - Web Interface & console port for management
 - Power Budget : 120 Watt

Power Supply

CP-DPS-MD50-12D
Metal Case Power Supply - 5 Amp



► Features:

- 12V DC - 5 Amp
- Short Circuit Protection
- Override & overvoltage Protection
- Long range Input Voltage

CP-DPS-MD100-12D
Metal Case Power Supply - 10 Amp



► Features:

- 12V DC - 10 Amp
- Short Circuit Protection
- Override & overvoltage Protection
- Long range Input Voltage


CP-DPS-MD200-12D
Metal Case Power Supply - 20 Amp



► Features:

- 12V DC - 20 Amp
- Short Circuit Protection
- Override & overvoltage Protection
- Long range Input Voltage


CP-DPS-PD04-12D
4 Ch. Power Supply



► Features:

- 4 channel output
- With cable compensation switch
- LED indicator for each channel
- Thermistor for each channel
- Built-in constant current limiting circuit
- Cooling by free air convection
- Plastic housing


CP-DPS-PD08-12D
8 Ch. Power Supply



► Features:

- 8 channel output
- With cable compensation switch
- LED indicator for each channel
- Thermistor for each channel
- Built-in constant current limiting circuit
- Cooling by free air convection
- Plastic housing

CP-DPS-PD16-12D
16 Ch. Power Supply




► Features:

- 16 channel output
- With cable compensation switch
- LED indicator for each channel
- Thermistor for each channel
- Built-in constant current limiting circuit
- Cooling by free air convection
- Plastic housing

Lock

CP-LA-ER3A-NC
E-lock




► Features:

- Double cylinders
- Push button
- Rotating brass latch with free locking function
- 5 Computerized keys
- Solid brass cylinder, latch, deadbolt
- Finishing: Nickel plated
- Voltage/Current: 12V/3A
- Dimension: 148mm x 107mm x 60mm

HDMI Cables

CP-FA-M1401/1403
HDMI Cable (1.5/3Mtr.)



► Features:

- High quality HDMI Cables options (1.5/3M)
- High Performance Version 1.4, 14+1
- 4K Resolution Support
- Gauge: 32AWG~30AWG
- 3D support for immersive movies and gaming
- DTS Dolby Digital Audio support
- Dynamic synchronization of video and audio streams

CP-FA-M1405
HDMI Cable (5Mtr.)



► Features:

- High quality HDMI Cables options (5M)
- High Performance Version 1.4, 14+1
- UHD Resolution Support
- Gauge: 30AWG~26AWG
- 3D support for immersive movies and gaming
- DTS Dolby Digital Audio support
- Dynamic synchronization of video and audio streams

CP-FA-M1410
HDMI Cable (10Mtr.)



► Features:

- High quality HDMI Cables options (10M)
- High Performance Version 1.4, 14+1
- UHD Resolution Support
- Gauge: 30AWG~26AWG
- 3D support for immersive movies and gaming
- DTS Dolby Digital Audio support
- Dynamic synchronization of video and audio streams

CP-FA-M1415
HDMI Cable (15Mtr.)




► Features:

- High quality HDMI Cables options (15M)
- High Performance Version 1.4, 14+1
- UHD Resolution Support
- Gauge: 30AWG~26AWG
- 3D support for immersive movies and gaming
- DTS Dolby Digital Audio support
- Dynamic synchronization of video and audio streams

Cables


CP-EUT-6TGL-305
CAT6, 4Pair 23AWG UTP Cable (Tangle Free)

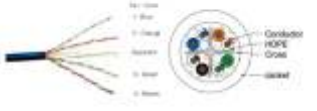

► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable


CP-EUT-6TGH-305
CAT6 4Pair 23 AWG UTP cable (Reel)

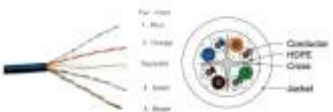

► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable


CP-EUT-6TGL1-305
CAT6, 4Pair UTP Cable (Tangle Free)

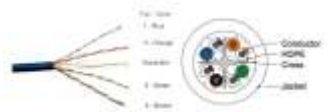

► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 24 AWG cable


CP-EUT-6TGH1-305
CAT6 4Pair UTP cable (Reel)



► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 24 AWG cable

CP-EST-6TGR-305
CAT6 SFTP Cable

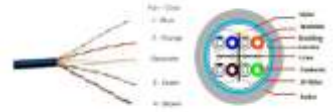

► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- 4 Pair Separator Design
- 23 AWG cable
- Dual shielding of foil and overall braid

CP-EST-6TGD-305
CAT6 Double Jacket Cable

▶ Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA-568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable
- Can be used for Outdoor Application
- Available in Combination of PVC and LDPE jacket

CP-EST-6TGA-305
CAT6 Armoured Cable

▶ Features:

- Generally conforming to EIA/TIA 568-C.2 and IEC/ISO11801
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable
- For Outdoor installation

DVR/NVR/Switches Rack

CP-MA-RK3535-2U
2U DVR/ NVR Rack

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs from Theft.
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key
- Top & Bottom cover: cable entry cut-outs
- Toughened Glass used as an excellent thief deterrent
- Standard finish: Powder coated

CP-MA-RK5540-4U
4U DVR/ NVR Network Rack (Unloaded)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs/ NVRs from Theft
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key
- Top & Bottom cover: Fan Provision with ventilation along with cable entry cut-outs.
- Toughened Glass used as an excellent thief deterrent
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

DVR/NVR/Switches Rack

CP-HA-RK5540-4U
4U DVR/ NVR Network Rack (Unloaded)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs/ NVRs from Theft
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key
- Top & Bottom cover: Fan Provision with ventilation along with cable entry cut-outs.
- Toughened Glass used as an excellent thief deterrent
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5540-4L1
4U DVR/ NVR Network Rack (With Cable Tray & PDU)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs/ NVRs from Theft
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key
- Top & Bottom cover: Fan Provision with ventilation along with cable entry cut-outs.
- Toughened Glass used as an excellent thief deterrent
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5540-4L
4U DVR/ NVR Network Rack (With Fan, Cable Manager & PDU)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs/ NVRs/Switches from Theft
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key
- Top & Bottom cover: Fan Provision with ventilation along with cable entry cut-outs.
- Toughened Glass used as an excellent thief deterrent
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5545-6L
6U DVR/ NVR Network Rack (With Fan, Cable Manager & PDU)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DVRs/ NVRs/Switches from Theft
- Basic frame: CRCA (MS SHEET) 0.8mm thick
- Construction: Welded.
- Front Door: Lockable Toughened / Clear Glass with Lock & Key.
- Top & Bottom cover: 2 Fan Provision with ventilation along with cable entry cut-outs.
- Toughened Glass used as an excellent thief deterrent
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-PA-RK5563-9U
9U Rack (With Fan, Cable Manager & PDU)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 9U 630mm deep 19"
- 1.6MM Vertical Mounting Rail with clear 'U' Marking
- 0.8MM CRCA Sheet
- Cooling Fan options (min 2).
- Cable entry/exit provision at top and bottom with rubber at edges
- Front with Toughened Glass Door & Lock (5 MM)
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5545-12U
12U DVR/ NVR Network Rack (Unloaded)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 12U
- 1.6MM Vertical Mounting Rail with clear 'U' Marking
- 0.8MM CRCA Sheet
- Cable entry/exit provision at top and bottom with rubber at edges
- Front with Toughened Glass Door & Lock (5 MM).
- Wall Mounting Kit
- For Small Networking, Telecom, Audio video, CCTV applications
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5545-12L
12U DVR/ NVR Network Rack (With Fan, Cable Manager & PDU)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 12L
- 0.8MM CRCA Sheet
- Cable entry/exit provision at top and bottom with rubber at edges
- Front with Toughened Glass Door & Lock (5 MM).
- Powder coated Color- RAL- 7035
- Wall Mounting Kit
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-PA-RK5563-15U
15U Rack (Unloaded)

▶ Features:

- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 15U 630mm deep 19"
- 1.6MM Vertical Mounting Rail with clear 'U' Marking
- 0.8MM CRCA Sheet
- Cooling Fan options (min 2)
- Front with Toughened Glass Door & Lock (5 MM).
- Powder coated Color- RAL- 7035
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5563-15L

15U Rack (With Fan, Cable Manager & PDU)



- Features:
- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
 - Wall Mount Rack 15U 630mm deep 19"
 - 0.8MM CRCA Sheet
 - Cooling Fan options (min 2)
 - Front with Toughened Glass Door & Lock (5 MM).
 - Powder coated Color- RAL- 7035
 - Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-PA-RK6010-24U

24U Rack



- Features:
- Floor Standing Rack 24U 1000MM deep, 600MM width 19"
 - Main Frame Pillar; 125MM width with removable side panels
 - 1.2mm CRCA Sheet
 - Castor wheels 4 inch with front brake
 - Two line cable entry/exit provision at top/ bottom with rubber
 - Rear MS vented or perforated door
 - Two line cable entry/exit provision at top/ bottom with rubber
 - FHU with two Fan 180 CFM 1 No., Vertical PDU with 12x5/15 sockets 230Vots AC, 32 Amp with plug 1 No. and Horizontal cable manager-1U 4 Nos.

CP-PA-RK6010-42U

42U Rack



- Features:
- Floor Standing Rack 42U 1000MM deep, 600MM width 19"
 - Main Frame Pillar; 125MM width with removable side panels.
 - 1.6mm CRCA Sheet
 - L-Shape adjustable Vertical Mounting Rail 2MM with 'U' Marking
 - Front with Toughened Glass Door & Lock (5 MM).
 - Castor wheels 4 inch with front brake
 - For Medium / Large Networking, telecom, CCTV, AV & Cable TV applications
 - FHU with two Fan 180 CFM 1 No., Vertical PDU with 12x5/15 sockets 230Vots AC, 31 Amp with plug 1 No. and Horizontal cable manager-1U 4 Nos.

Value Series

CP-HA-RK4535VM-2U

2U Network Rack - Modular (value)



- Features:
- Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 450mmx350mmx140mm

CP-HA-RK5535VM-4U

4U Network Rack - Modular (value)



- Features:
- Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 550x350x240mm

CP-HA-RK4535VWL-2U

2U Network Rack - Moulded (value)



- Features:
- Welded Type
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated With PDU
 - Dimension : 450mmx350mmx140mm

CP-HA-RK5035VWL-3U

3U Network Rack - Moulded (value)



- Features:
- Welded Type
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated with PDU & Tray
 - Dimension : 500mmx350mmx200mm

CP-HA-RK5535VWL-4U

4U Network Rack - moulded (value)



- Features:
- Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated with Fan, PDU & Tray
 - Dimension : 550x350x240mm