




Multi Preview (Zero Encode) Through Local Interface

How to setup Multi Preview (Zero- Encode) from Orange DVR?

Step 1 - Go to Main Menu → Setting → Setting.

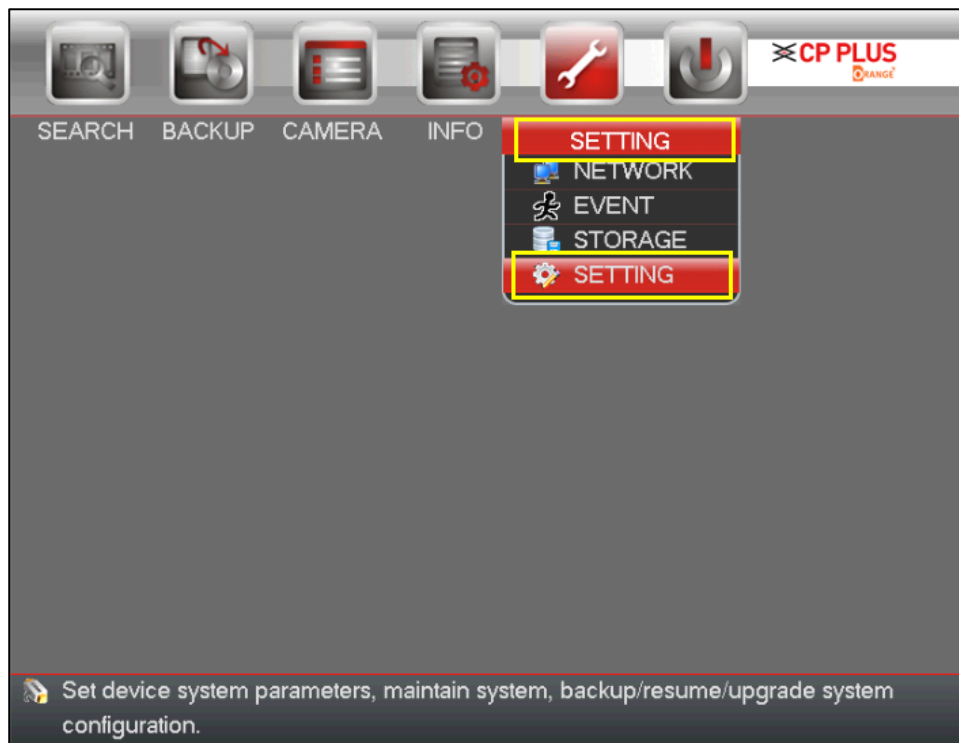


Step 2 - Here, select **DISPLAY** → **Multi Preview** and enable it. Now set all parameters as per your requirement and save button.



| S No. | Parameter | Description |
|-------|-------------|---|
| 1 | Enable | This function is disabled by default. Check the box here to enable this function so that you can control the zero-channel encoding function at the WEB. |
| 2 | Compression | System default setup is H.264. You can set according to device capability. |
| 3 | Resolution | The resolution value may vary due to different device capabilities. Please select from the dropdown list. |
| 4 | Frame rate | The frame rate value may vary due to different device capabilities. Please select from the dropdown list. |
| 5 | Bit Rate | The bit rate value may vary due to different device capabilities and frame rate setups. Please select from the dropdown list. |
| 6 | Save | Click the Save button to save current setup |

Step 3 - After enabling this function, access the DVR on Web and select zero-channel encoding mode at the right corner of the interface (*refer below image*). Select a mode to preview all channels on single screen.

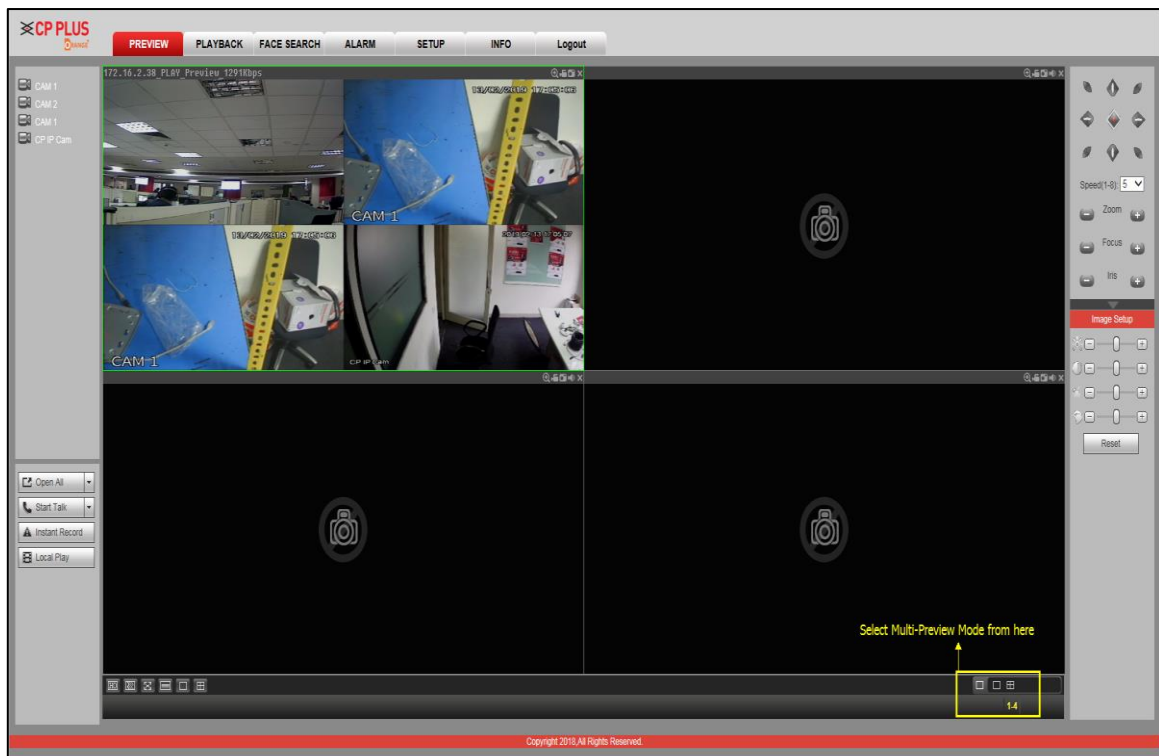

Thank You for Choosing CP Plus!!



Website: - www.cpplusworld.com

Email id: - sales@cpplusworld.com support@cpplusworld.com
